

RSL RETROFIT STRIP LIGHT

PROJECT: _____


SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® Retrofit Strip Light is an energy-saving, cost-effective, and easy to install replacement. This fixture mounts onto virtually any existing fluorescent channel; replacing existing 4' / 8' fluorescent strips and industrial fixtures to LED. Designed with round frosted acrylic lens and steel housing, improves an architectural look for retrofit replacement. Our RSL is a permanent solution that is suitable for applications including retail, warehouse, storage, and much more.

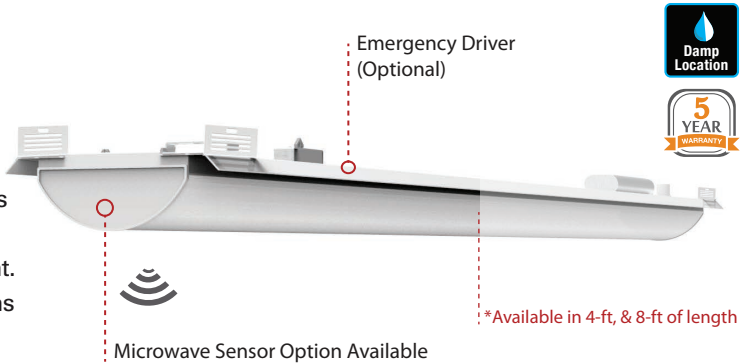

APPLICATIONS

Warehouse, Retail, Parking Garage, Stairwell and Hallways, Storage Lighting

Rated Life Hours 50,000
Warranty 5 Years

FEATURES

- DLC Standard
- Damp Location
- UL Listed
- Color Temp: 4000K, 5000K
- Voltage: 120-277V
- Power Factor: >0.9
- Surge Protection: 4KV
- Beam Angle: Flood
- Dimmable: 1-10V
- CRI: >80
- Operating temperature: - 22°F - 122°F
- Easy installation
- Contour, acrylic lens options provides glare diffusion
- Available in 4' or 8' length
- Material: Steel and PC lens
- 5Year Warranty
- Optional for Purchase: Motion Sensor, Emergency Driver, Step-Down Driver

ACCESSORIES

-  Motion Sensor
-  Emergency Drivers
-  Step Down Driver

SAMPLE NUMBER LED-FXRSL25/48FR/840/MV

STYLE	FAMILY	SERIES	WATTAGE	LENGTH/LENS	CRI/COLOR TEMP	VOLTAGE
LED	FX	RSL	25	48FR	840	MV
LED Lighting	Fixture	Retrofit Strip Light	25 Watt	48-inch Frosted	CRI 80 4000K	Multiple Voltage



RETROFIT STRIP LIGHT

CEILING & AREA LUMINAIRES

ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Size	Equiv. Wattage (W)	Damp Location	DLC (S/P)
25	9346	LED-FXRSL25/48FR/840/MV	4000K	3,944	5.5" x 48"	2X32W(T8)	•	S
25	9347	LED-FXRSL25/48FR/850/MV	5000K	3,977	5.5" x 48"	2X32W(T8)	•	S
56	9348	LED-FXRSL56/96FR/840/MV	4000K	8,425	5.5" x 96"	5X32W(T8)	•	S
56	9349	LED-FXRSL56/96FR/850/MV	5000K	8,464	5.5" x 96"	5X32W(T8)	•	S

ACCESSORIES (Ordered Separately)

Motion Sensor



P10234 SEN-MC605V-D
(Microwave Motion Sensor 0-10V)

Emergency Driver



7336 BAEM4-60BC/MV-A
(4W CEC Compliant LED Emergency Driver 120-277V
For 4ft: #9346, #9347)

Step Down Driver




P10429 BA-MTM00706227C
(347-480V to 277 Step Down Driver
for fixtures 70W and under)




7334 BAEM15-48BC/MV-A
(Emergency Backup Driver 120-277V
For 8ft: #9348, #9349)

DIMENSIONS

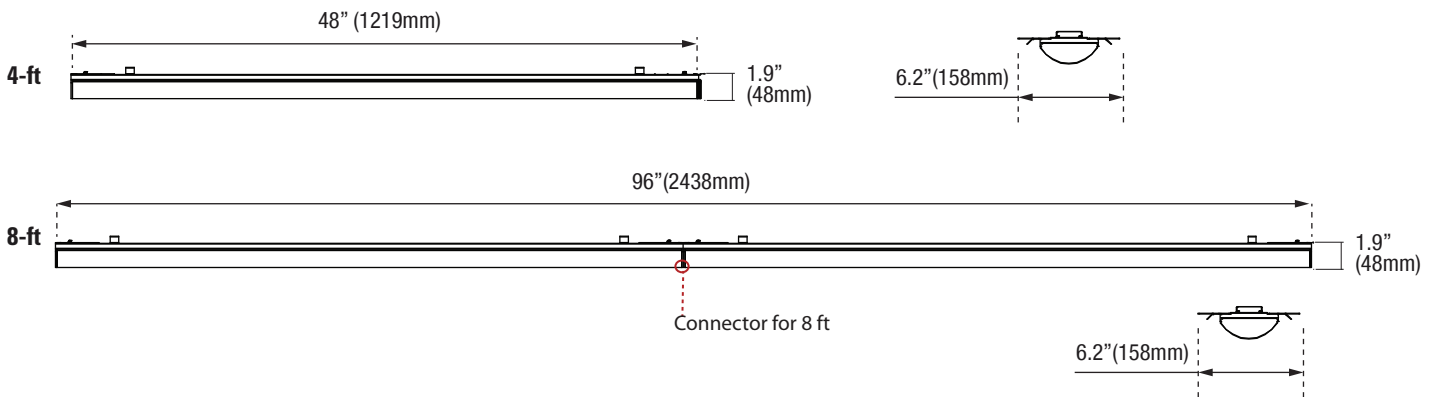


PHOTOMETRICS CHART

25 Watt - 4' DLC Standard



56 Watt - 8' DLC Standard



Center Beam Fc	Beam Width	
2.5ft	180 ft	7.6 ft 10.9 ft
5.0ft	45.0 fc	15.2 ft 21.8 ft
7.5ft	20.0 fc	22.8 ft 32.7 ft
10.0ft	11.2 fc	30.4 ft 43.7 ft
12.5ft	7.20 fc	38.0 ft 54.6 ft
15.0ft	5.00 fc	45.6 ft 65.5 ft

■ Vert. Spread: 113.3°
■ Horiz. Spread: 130.8°

Center Beam Fc	Beam Width	
2.5ft	395 fc	9.7 ft 7.4 ft
5.0ft	98.8 fc	19.5 ft 14.7 ft
7.5ft	43.9 fc	29.2 ft 22.1 ft
10.0ft	24.7 fc	38.9 ft 29.4 ft
12.5ft	15.8 fc	48.7 ft 36.8 ft
15.0ft	11.0 fc	58.4 ft 44.2 ft

■ Vert. Spread: 125.5°
■ Horiz. Spread: 111.6°

PACKAGE

Case Qty 1 pc

