



WARNING

1. Ensure power is off before starting installation, wiring or attempting any maintenance.
2. Installation should be performed by a person familiar with the construction and operation of the product and hazards involved to ensure personal safety.
3. All wiring should be performed by a qualified electrician.
4. The wall should have enough strength for installing the fixture; Its endurance must be more than the weight of the fixture.
5. This fixture is for outdoor use and should not be used in areas with limited ventilation or high ambient temperatures.

Installation

1. Turn off the power
2. Prepare the back plate for mounting by drilling or knocking out the appropriate holes and secure back plate to junction box (junction box not included) (Diagram 1)
3. Line up the back plate in desired location and mount securely. (Two gaskets provided for weather-tight seal between template and junction box.) (Figure 1)
4. Connect the output lines: (Diagram 2)
 - Fire wire (L) to the black line
 - Neutral wire (N) to the white line
 - Ground wire (G) to the green/yellow line
5. Put the cover on by connect the hinge. (Figure 2)
6. Close and lock the cover (Figure 3)
7. Turn on the power

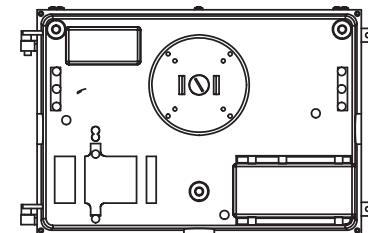


Diagram 1

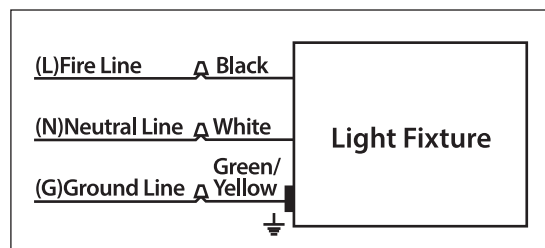


Diagram 2

Drill through the hole;
lock the base onto the
wall

Wall

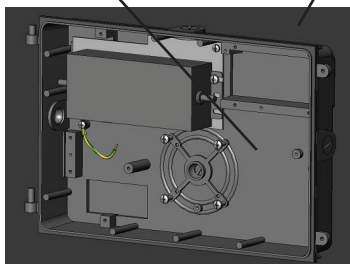


Figure 1

Turn over the Cover;
Let the cover fit the
base exactly

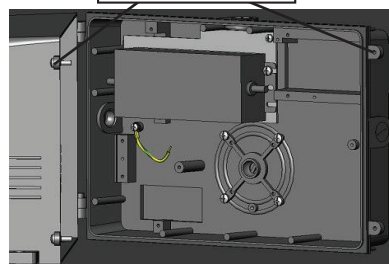


Figure 2

Lock the fixture
with the screws



Figure 3



PHILIPS
LUMILEDS