

CWS COMMERCIAL WRAP CCT3

PROJECT: _____


SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® Commercial Wrap (CWS) now offers the perfect solution for your lighting needs. The Commercial utility wrap fixtures are designed for saving energy and easy installation. Available in selectable wattage and selectable CCT; delivering up to 6,000 lumens with excellent and consistent color. Our Commercial Utility Wrap features a full wrap-around lens and is 48 inches long; designed for junction box installation and works great in parking garages, stairwells, offices, hallways, industrial, commercial and residential, ceiling or wall mounted. This fixture is versatile and efficient.

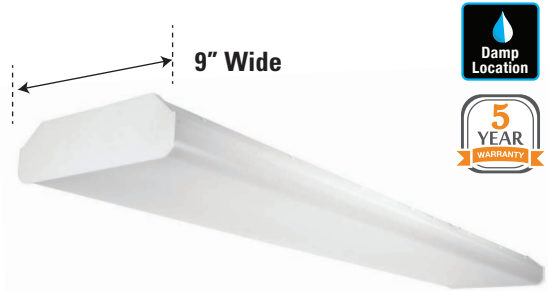

APPLICATIONS

Conference/Meeting Room, Stairwells, Schools/ Universities, Hospitals, Hotels, Parking Garages








**Rated Life 50,000 Hours
Warranty 5 Years**

FEATURES

- DLC Standard
- Damp Location
- UL Listed
- Selectable Wattages (22 / 28 / 34 / 44W)
- Color Temp: 3CCT (3500,4000,5000K)
- Voltage: 120-277V
- Input Current: 0.4A
- Powerfactor >0.9
- Surge Protection: 2KV
- Beam Angle: 110°
- Dimmable: 0-10V
- CRI: >80
- Operating temperature: -13°F - 104°F
- Lightweight for easy installation
- Excellent thermal design
- Uniform and consistent color
- 5 Year Warranty
- Optional for Purchase: Emergency Driver, Motion Sensor, Surge Protector

ACCESSORIES

	Emergency Driver
	Motion/ Daylight Sensor
	Surge Protector
	Wire Guard
	Replacement Lens

SAMPLE NUMBER FXCWS44SW/48FR/8CCT3

FAMILY	SERIES	WATTAGE	LENGTH/ LENS	CRI/COLOR TEMP
FX Fixture	CWS Commercial Wrap	44SW < 44 Watt Selectable Wattages 22W,28W,34W,44W	48FR 48" Frosted	8CCT3 CRI 80 3CCT Selectable 3500K, 4000K, 5000K



COMMERCIAL WRAP CCT3

CEILING LUMINAIRES

ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Size	Damp Location	DLC (S/P)
22	9585	FXCWS44SW/48FR/8CCT3	3CCT	3,102	4 x32WT8	9" x48"	•	S
28			(3500/4000/	3,920				
34			5000K)	4,726				
44				6,063				

ACCESSORIES (Ordered Separately)



Emergency Driver
7336 BAEM4-60BC/MV-A
(Emergency driver)



Remote Control
P10323 SEN-HD06R
(Remote Programmer for P10438)



Wire Guard
P10157 WG-9CWS44/48/WH
(Wire Guard for CWS44)



Motion Sensor
P10438 SEN-HB001VCR-1
(12V Motion Sensor 0-10V Dimming)



Surge Protector
P10389 SPD-L-10KV-277
(Surge Protection 10KV 120-277V)



Lens
P10016 LENS-CWS44-4FT
(Replacement Lens for CWS44)




P10390 SPD-L-20KV-277
(Surge Protection 20KV 120-277V)

DIMENSIONS

(48-inch)


11.02-lbs

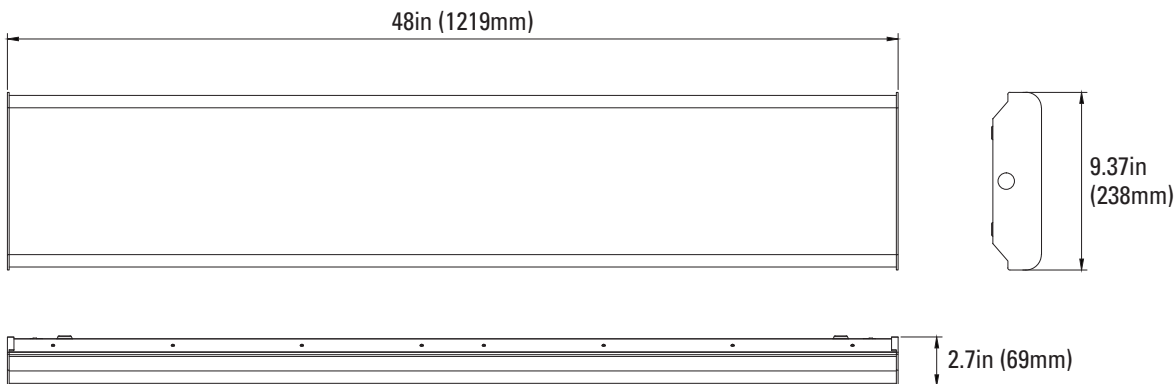

PHOTOMETRICS CHART

(48-inch)

DLC Standard

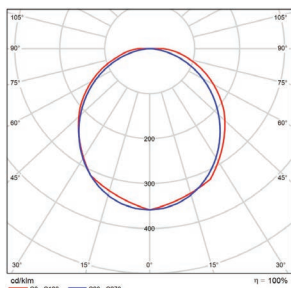

	Illuminance at a Distance	
	Center Beam fc	Beam Width
4.3ft	118 fc	12.7 ft 11.2 ft
8.7ft	28.8 fc	25.7 ft 22.7 ft
13.0ft	12.9 fc	38.4 ft 33.9 ft
17.3ft	7.30 fc	51.1 ft 45.1 ft
21.7ft	4.64 fc	64.1 ft 56.6 ft
26.0ft	3.23 fc	76.8 ft 67.8 ft

■ Vert. Spread: 111.8°
■ Horiz. Spread: 105.0°

PACKAGE

Case Qty
1 pc

