

## DLR/DLS SLIM DISK LIGHT CCT5

PROJECT: \_\_\_\_\_

SCHEDULE: \_\_\_\_\_ DATE: \_\_\_\_\_

PREPARE BY: \_\_\_\_\_

NOTES: \_\_\_\_\_

### DESCRIPTION

Introducing our ultra-low profile selectable CCT LED downlight with matte white flange and die-cast aluminum construction for durability. This down slim light can accommodate dimmable LED lamp for delivering a light output up to 900+ lumens with 5 selectable color temperature (2700K,3000K,3500K,4000K,5000K) and CRI 90. Shaped in round and square downlight has a trim of 4-inch and 6-inch with high impact diffused lens shade for even light distribution. It is suitable for wet locations.



### APPLICATIONS


Kitchen, decoration, hallway, bedroom, ceiling mount lighting

### FEATURES



- Energy Star Qualified
- Wet Location
- ETL Listed
- IC rated
- JA8/Title 24
- ColorTemp: 5CCT (2700K, 3000K, 3500K, 4000K, 5000K)
- Voltage: 120V
- Input current: 0.10 - 0.12A
- Power Factor: >0.9
- Beam Angle: Flood
- Dimmable
- CRI: >90
- Operating temperature: -4°F - 113°F
- Surge Protection: DM=1KV, CM=2KV
- Ultra slim design for dry wall (no recessed can needed)
- 4" / 6" round or square design
- Recommended ceiling height at 9-10ft
- Color: White

### EASY INSTALLATION

Snap-in mounting springs and easy wiring access for quick installation



### STYLES

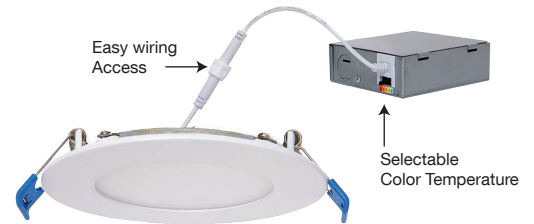

## SAMPLE NUMBER LED4DLR-65L9CCT5

STYLE	DIAMETER	SERIES	LUMENS	CRI	COLOR TEMP
LED	4	DLR	65L	9	CCT5
LED Lighting	4 inch	Slim Disk Light Round	650+	CRI 90	Selectable Color Temperature (2700K,3000K,3500K, 4000K, 5000K)
		DLS			
		Slim Disk Light Square			



# SLIM DISK LIGHT CCT5

CEILING LUMINAIRES

## ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Size	Equiv. Wattage (W)	Energy Star
10	<b>9361</b>	LED4DLR-65L9CCT5	27/30/35/40/5000K	650	4" Round	60	•
10	<b>9362</b>	LED4DLS-65L9CCT5	27/30/35/40/5000K	650	4" Square	60	•
12	<b>9363</b>	LED6DLR-90L9CCT5	27/30/35/40/5000K	900	6" Round	90	•
12	<b>9364</b>	LED6DLS-90L9CCT5	27/30/35/40/5000K	900	6" Square	90	•

## ACCESSORIES (Ordered Separately)

### Plate for 4" Disk Light



P10308 PLT-NC/4DL  
(4" Round Pre-Mounting Plate)

### Plate for 3/4/6/8" Disk Light



P10375 PLT-NC-DL/3-4-6-8  
(Universal Plate for 3/4/6/8" Disk Light)

### Plate for 6" Disk Light



P10309 PLT-NC/6DL  
(6" Round Pre-Mounting Plate)

### Emergency Driver




7337 BAEM25-170BC/347-C  
(25W Micro Inverter 120-347 with 12" Conduit)

## DIMENSIONS


### 4" - Round

0.90-lbs

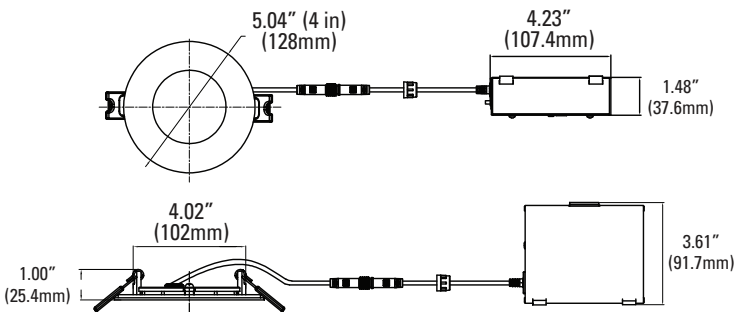


### 4" - Square

1.00-lbs

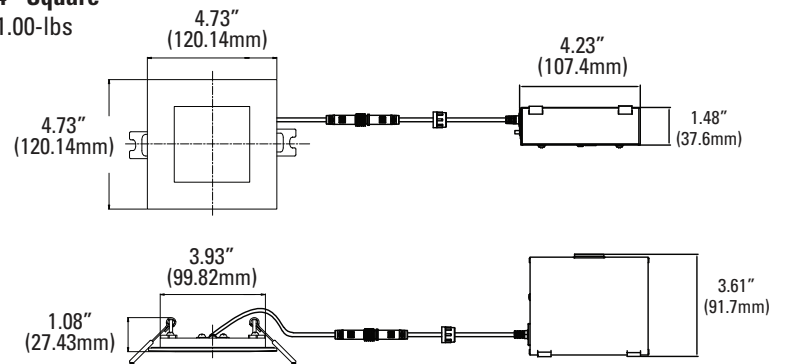


### 6" - Round

1.21-lbs

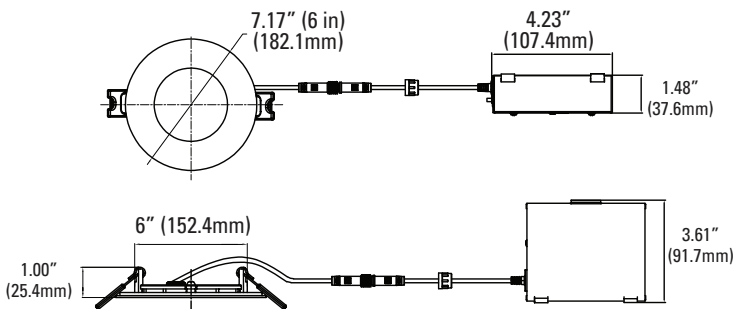


### 6" - Square

1.43-lbs

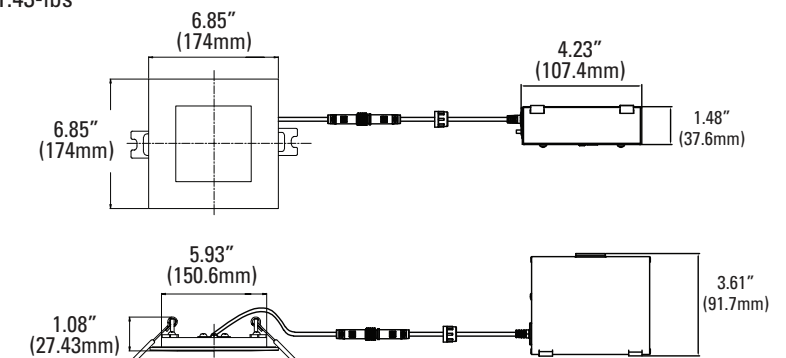

PHOTOMETRICS CHART


4-inch Round Energy Star

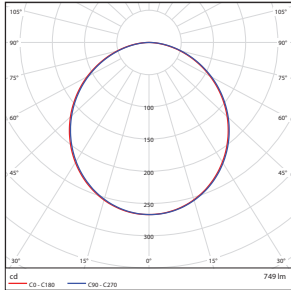

Illuminance at a Distance			
	Center Beam fc	Beam Width	
1.7R	92.4 fc	4.9 ft	4.9 ft
3.3R	24.5 fc	9.5 ft	9.5 ft
5.0R	10.7 fc	14.4 ft	14.3 ft
6.7R	5.95 fc	19.2 ft	19.2 ft
8.3R	3.88 fc	23.8 ft	23.8 ft
10.0R	2.67 fc	28.7 ft	28.7 ft

■ Vert. Spread: 110.3°  
■ Horiz. Spread: 110.3°


4-inch Square Energy Star

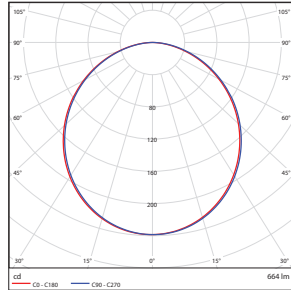

Illuminance at a Distance			
	Center Beam fc	Beam Width	
1.7R	82.6 fc	4.8 ft	4.8 ft
3.3R	21.9 fc	9.4 ft	9.4 ft
5.0R	9.54 fc	14.2 ft	14.3 ft
6.7R	5.31 fc	19.1 ft	19.1 ft
8.3R	3.46 fc	23.6 ft	23.7 ft
10.0R	2.39 fc	28.5 ft	28.5 ft

■ Vert. Spread: 109.8°  
■ Horiz. Spread: 109.9°


6-inch Round Energy Star

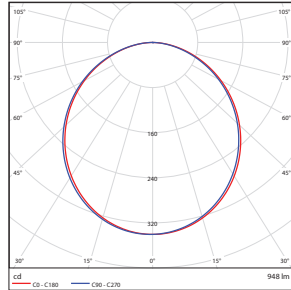

Illuminance at a Distance			
	Center Beam fc	Beam Width	
1.7R	118 fc	4.8 ft	4.8 ft
3.3R	31.3 fc	9.4 ft	9.3 ft
5.0R	13.6 fc	14.2 ft	14.2 ft
6.7R	7.58 fc	19.0 ft	19.0 ft
8.3R	4.94 fc	23.6 ft	23.5 ft
10.0R	3.40 fc	28.4 ft	28.3 ft

■ Vert. Spread: 109.7°  
■ Horiz. Spread: 109.5°

6-inch Square Energy Star

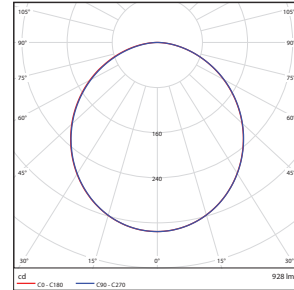

Illuminance at a Distance			
	Center Beam fc	Beam Width	
1.7R	116 fc	4.8 ft	4.8 ft
3.3R	30.8 fc	9.3 ft	9.3 ft
5.0R	13.4 fc	14.1 ft	14.1 ft
6.7R	7.47 fc	18.9 ft	18.8 ft
8.3R	4.87 fc	23.4 ft	23.3 ft
10.0R	3.35 fc	28.2 ft	28.1 ft

■ Vert. Spread: 109.3°  
■ Horiz. Spread: 109.2°

PACKAGE

Case Qty 20 pcs

