

FMC FLUSH MOUNT COMPACT 7" (CCT5)

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® Compact Flush Mounts (FMC) are an excellent replacement solution for traditional incandescent and fluorescent ceiling and wall mounted fixtures. Our FMC series is easy to install, dimmable, and wet location rated. The FMC is available in 2 models; a 3000K version, or CCT5 Selectable: 2700K, 3000K, 3500K, 4000K, 5000K. Perfect for residential, commercial and hospitality applications. Ideal for bathrooms, closets, small rooms, storage areas, hallways and stairways.

APPLICATIONS

Bathroom, Decoration, Hallway, Bedroom, Ceiling Mount



FEATURES

- Energy Star
- Wet Location
- UL Listed
- ColorTemp: 5 CCT (2700K,3000K,3500K,4000K,5000K), 3000K
- Voltage: 120V
- Powerfactor >0.9
- Surge Protection: 2.5KV
- Beam Angle: Flood
- Dimmable: Incandescent dimming
- CRI: >90
- Operating temperature: - 4°F - 104°F
- Uniform light distribution and consistent color
- Recommended ceiling height: 8-10ft
- Color: White
- 5 Year Warranty
- Optional Accessory for purchase: Emergency Driver



Rated Life 50,000 Hours
Warranty 5 Years

ACCESSORIES (INCLUDED)

-  Recessed can installation kit
-  Emergency Driver

SAMPLE NUMBER		LED7FMC-96L9CCT5			
STYLE	DIAMETER	SERIES	LUMEN	CRI	COLOR TEMP
LED	7	FMC	96L	9	CCT5
LED Lighting	7 inch	Flush Mount Compact	960 Lumens	CRI 90	5 Selectable Color Temp



FLUSH MOUNT COMPACT 7" (CCT5)

CEILING & AREA LUMINAIRES

ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Size	Wet Location	Energy Star
12	9522	LED7FMC-96L930	3000K	960	100	7"	•	•
12	9523	LED7FMC-96L9CCT5	5CCT(27/30/35/40/50K)	960	100	7"	•	•

ACCESSORIES (INCLUDED)

Installation Kit

(Recessed can installation kit)



Wire Nut X3PCS



For Mounting Plate



Torsion springs



E26 Adapter



Mounting Plate

ACCESSORIES (Ordered Separately)


Emergency Driver




7337 BAEM25-170BC/347-C
(25W Micro Inverter 120-247V with 12" Conduit)

DIMENSIONS

12W (7-inch)
0.53-lbs

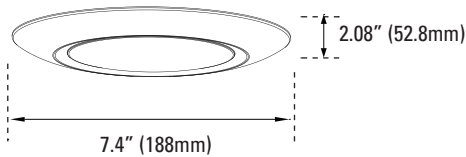


12W (7-inch) CCT5
0.55-lbs

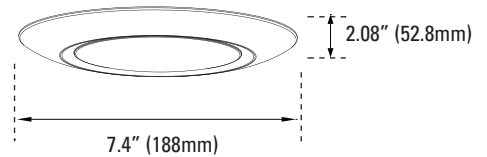

PHOTOMETRIC CHART


12W (7-inch)
Energy Star



Center Beam fc	Beam Width	
1.7R	116 fc	5.1 ft 5.1 ft
3.3R	30.8 fc	9.8 ft 9.9 ft
5.0R	13.4 fc	14.9 ft 15.0 ft
6.7R	7.47 fc	20.0 ft 20.0 ft
9.3R	4.86 fc	24.8 ft 24.8 ft
10.0R	3.35 fc	29.8 ft 29.9 ft

■ Vert. Spread: 112.3°
■ Horiz. Spread: 112.5°

12W (7-inch) CCT5
Energy Star



Center Beam fc	Beam Width	
1.7R	116 fc	5.0 ft 5.1 ft
3.3R	30.8 fc	9.8 ft 9.8 ft
5.0R	13.4 fc	14.8 ft 14.9 ft
6.7R	7.47 fc	19.9 ft 20.0 ft
9.3R	4.87 fc	24.6 ft 24.7 ft
10.0R	3.35 fc	29.6 ft 29.8 ft

■ Vert. Spread: 112.0°
■ Horiz. Spread: 112.3°

PACKAGE

Case Qty
20 pcs

