

PROJECT: \_\_\_\_\_

SCHEDULE: \_\_\_\_\_ DATE: \_\_\_\_\_

PREPARE BY: \_\_\_\_\_

NOTES: \_\_\_\_\_

**FMS FLUSH MOUNT STREAMLINED**

**DESCRIPTION**

naturaLED® Flush Mount Streamlined (FMS) Is an excellent LED replacement solution for Incandescent or Fluorescent lights. Our FMS works in a variety of applications and is a simple streamlined design. These fixtures are designed with an even and consistent distribution of light and are available in 11 and 15 inch, the FMS has a twist-lock glass lens and your choice of a bronze or nickel finish.



**Rated Life 50,000 Hours**  
**Warranty 5 Years**

**APPLICATIONS**

Kitchen, Decoration, Hallway, Bedroom, Hospitality, Ceiling Mount Lighting

**FEATURES**

- Energy Star
- Damp Location
- UL Listed
- Color Temp: 3000K, 4000K
- Voltage: 120V
- Powerfactor >0.9
- Dimmable
- CRI: >80
- Operating temperature: - 4°F - 104°F
- Uniform light distribution and consistent color
- Easy installation
- Retrofit for Incandescent and CFL flush mount
- Twist-Lock Glass Lens
- Recommended ceiling height: 9-10ft
- Colors: Nickel, Bronze
- 5 Year Warranty

**RETROFIT / SAVE ENERGY**  
Replace Incandescent and CFL light with LED

Incandescent and CFL                      LED

**SAMPLE NUMBER      LED15FMS-154L830-BZ**

STYLE	DIAMETER	SERIES	LUMEN	CRI/COLOR TEMP	COLOR
LED	15	FMS	154L	830	BZ
LED Lighting	15-inch	Flush Mount Streamlined	1,540 Lumens	CRI 80 3000K	Bronze



# FLUSH MOUNT STREAMLINED CEILING & AREA LUMINAIRES

## ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Size	Color	Damp Location	Energy Star
22	<b>7421</b>	LED15FMS-154L830-BZ	3000K	1,540	150	15"	Bronze	•	•
14	<b>7425</b>	LED11FMS-98L840-NI	4000K	980	100	11"	Nickel	•	•
22	<b>7427</b>	LED15FMS-154L830-NI	3000K	1,540	150	15"	Nickel	•	•

## ACCESSORIES (Ordered Separately)


### Emergency Driver




7337 BAEM25-170BC/347-C  
(25W Micro Inverter 120-347 with 12" Conduit)

## DIMENSIONS

**14W (11-inch)**  
3.30-lbs

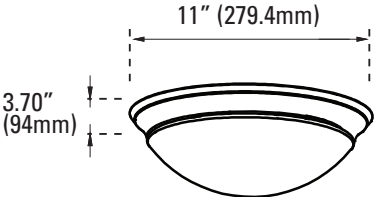


**22W (15-inch)**  
4.75-lbs

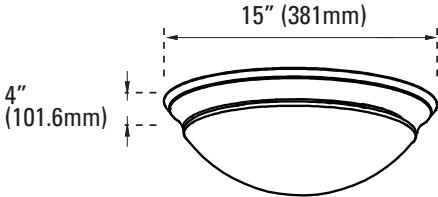

## PHOTOMETRICS CHART


**14W (11-inch)**  
Energy Star



Center Beam f.c.	Beam Width ft.
2.5R	51.7 f.c. 6.9 ft. 6.9 ft.
5.0R	12.9 f.c. 13.9 ft. 13.8 ft.
7.5R	5.75 f.c. 20.8 ft. 20.7 ft.
10.0R	3.23 f.c. 27.7 ft. 27.6 ft.
12.5R	2.07 f.c. 34.7 ft. 34.5 ft.
15.0R	1.44 f.c. 41.6 ft. 41.4 ft.

Vert. Spread: 100.4°  
Horiz. Spread: 108.2°

**22W (15-inch)**  
Energy Star



Center Beam f.c.	Beam Width ft.
2.5R	63.0 f.c. 10.0 ft. 9.6 ft.
5.0R	15.7 f.c. 20.0 ft. 19.2 ft.
7.5R	7.00 f.c. 30.1 ft. 28.8 ft.
10.0R	3.94 f.c. 40.1 ft. 38.4 ft.
12.5R	2.52 f.c. 50.1 ft. 48.0 ft.
15.0R	1.75 f.c. 60.1 ft. 57.6 ft.

Vert. Spread: 127.0°  
Horiz. Spread: 125.0°

## PACKAGE

Case Qty  
2 pcs

