

## SCM SLIM CANOPY 10"x10"

PROJECT: \_\_\_\_\_

SCHEDULE: \_\_\_\_\_ DATE: \_\_\_\_\_

PREPARE BY: \_\_\_\_\_

NOTES: \_\_\_\_\_

### DESCRIPTION

naturaLED® SCM IP65 rated fixtures come in an aesthetically pleasing construction, low-profile design with die-cast aluminum housing and shatter-resistant polycarbonate prismatic lens. In addition, they are dust-proof and include 1/2" threaded conduit entrances on each side. The SCM fixtures are available with or without a microwave occupancy sensor mounted behind the lens. This sensor has multiple settings that can be selected via a dip switch. The settings on the sensor include: step dimming, area sensitivity, standby time and on/off. The SCM supports both pendant mounting and direct surface mounting ceiling or wall. Pendant mounting accepts a 3/4" NPT thread and can be mounted to multiple types of J-boxes.



**Rated Life 50,000 Hours**  
**Warranty 5 Years**

### APPLICATIONS

Warehouses, Parking Garages, Offices, Factories, Hospitals, Hotels

### FEATURES

- DLC Premium Qualified
- IP65 Rated
- ETL Listed
- ColorTemp: 4000K, 5000K
- Voltage: 120-277V
- Powerfactor >0.9
- Surge Protection: 4KV
- Beam Angle: 160°
- Dimmable: 1-10V
- CRI: >80
- Operating temperature: - 40°F - 122°F
- Long life LED chips
- Material: Aluminum Die-Cast
- Colors: Black /White
- 5 Year Warranty
- Optional for purchase: Emergency Driver, Drop/Frosted Lens, Photocell, Motion Sensor, Surge Protector, Beauty Plates

### ACCESSORIES

	Emergency Driver
	Motion Sensor
	Beauty Plate
	Drop Lens
	Frosted Lens
	Surge Protector
	Photocell

SAMPLE NUMBER		FX10SCM28/840/BK-SEN				
FAMILY	SIZE	SERIES	WATTAGE	CRI/COLOR TEMP	COLOR	ACCESSORY
FX	10	SCM	28	840	BK	SEN
Fixture	10-inch	Slim Canopy	28 Watt	CRI 80 4000K	Black (WH) White	Motion Sensor none N/A



# SLIM CANOPY 10X10

CEILING & AREA LUMINAIRES

## ORDERING

\*P= Premium DLC / \*S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Dim (V)	Color	Sensor	IP65 Rated	DLC (S/P)
28	<b>9432</b>	FX10SCM28/840/BK-SEN	4000K	3,640	150	1-10V	Black	•	•	P
28	<b>9433</b>	FX10SCM28/850/BK-SEN	5000K	3,640	150	1-10V	Black	•	•	P
42	<b>9434</b>	FX10SCM42/840/BK-SEN	4000K	5,517	175	1-10V	Black	•	•	P
59	<b>9436</b>	FX10SCM59/840/BK-SEN	4000K	7,695	250	1-10V	Black	•	•	P
28	<b>9414</b>	FX10SCM28/840/BK	4000K	3,640	150	1-10V	Black	-	•	P
28	<b>9415</b>	FX10SCM28/850/BK	5000K	3,640	150	1-10V	Black	-	•	P
42	<b>9418</b>	FX10SCM42/840/BK	4000K	5,517	175	1-10V	Black	-	•	P
59	<b>9422</b>	FX10SCM59/840/BK	4000K	7,695	250	1-10V	Black	-	•	P
59	<b>9423</b>	FX10SCM59/850/BK	5000K	7,845	250	1-10V	Black	-	•	P
28	<b>9416</b>	FX10SCM28/840/WH	4000K	3,640	150	1-10V	White	-	•	P
28	<b>9417</b>	FX10SCM28/850/WH	5000K	3,640	150	1-10V	White	-	•	P
42	<b>9420</b>	FX10SCM42/840/WH	4000K	5,517	175	1-10V	White	-	•	P
42	<b>9421</b>	FX10SCM42/850/WH	5000K	5,638	175	1-10V	White	-	•	P
59	<b>9424</b>	FX10SCM59/840/WH	4000K	7,695	250	1-10V	White	-	•	P

## ACCESSORIES (Ordered Separately)

### Motion Sensor



P10234 SEN-MC605V-D  
(Microwave Motion Sensor 0-10V)

### Emergency Driver



7336 BAEM4-60BC/MV-A  
(Emergency Driver for 28W, 42W, 59W  
For 59W usage up to 10-12ft in height  
\*not available for #9432, 9433, 9434, 9436)

### Photocell



P10036 SEN-PHO-BT-MT/MV  
(Button Photocell 120V-277)

### Beauty Plates



P10195 PLT-SCM/14X14/WH  
(14"x14" Beauty Plate used with SCM)  
P10196 PLT-SCM/24X24/WH  
(24"x24" Beauty Plate used with SCM)

### Frosted Lens



P10125 LENS-SCM/FR9X9  
(Frosted Lens for SCM 28W, 42W, 59W)

### Drop Lens



P10126 LENS-SCM/DR9X9  
(Drop Lens for SCM 28W, 42W, 59W)

### Surge Protector



P10389 SPD-L-10KV-277  
(Surge Protection 10KV 120-277V)




P10390 SPD-L-20KV-277  
(Surge Protection 20KV 120-277V)



P10391 SPD-L-20KV-480  
(Surge Protection 20KV 347-480V)


**DIMENSIONS**

**28W**      **42W**      **59W**  
4.50-lbs    5.10-lbs    5.10-lbs

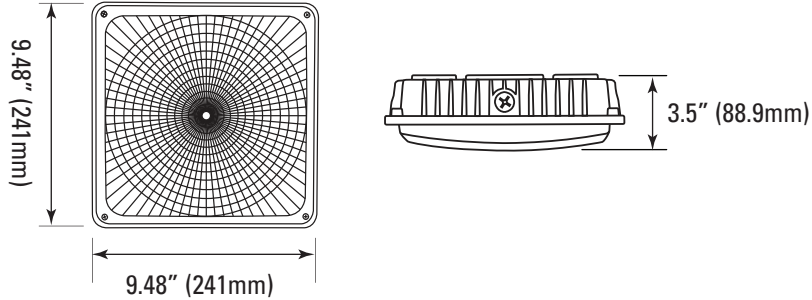


**PHOTOMETRICS CHART**


**28 Watt**  
DLC Premium

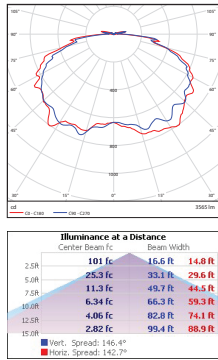


**42 Watt**  
DLC Premium

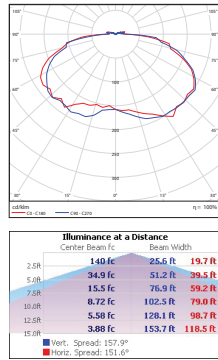


**59 Watt**  
DLC Premium

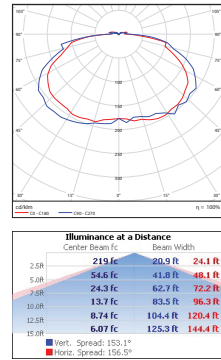


**28 Watt with sensor**  
DLC Premium

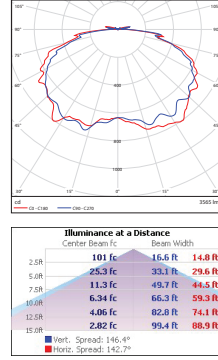

**42 Watt with sensor**  
DLC Premium

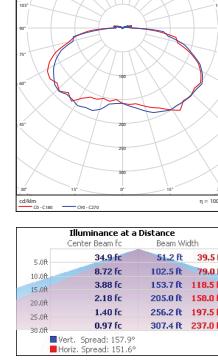

**59 Watt with sensor**  
DLC Premium

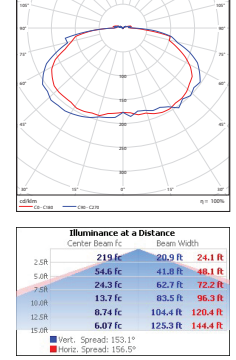

**PACKAGE**

Case Qty 1 pc

