

SCM SLIM CANOPY CCT3

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® SCM IP65 rated fixtures come in an aesthetically pleasing construction, low-profile design with die-cast aluminum housing and shatter-resistant polycarbonate prismatic lens. The SCM fixtures are available in selectable wattages and selectable color temperatures. The SCM supports both pendant mounting and direct surface mounting ceiling or wall. Pendant mounting accepts a 3/4" NPT thread and can be mounted to multiple types of J-boxes.



Rated Life 50,000 Hours
Warranty 5 Years









APPLICATIONS

Warehouses, Parking Garages, Offices, Factories, Hospitals, Hotels

FEATURES

- DLC Premium Qualified
- IP65 Rated
- ETL/cETL Listed
- Wattage & Color Selectable
- Wattage: 28-57W, 60-100W
- Color Temp: CCT3 (30/40/50K)
- Voltage: 120-277V
- Surge Protection: 4KV
- Dimmable: 0-10V
- CRI >80
- Operating temperature: - 40°F - 122°F
- Beam Angle: 160° (Parking Garages)
- 1/2" Conduit on 3-sides
- Material: Die-Cast Aluminum
- Colors: Black, White
- Warranty: 5-Year
- Optional Accessories for purchase: Microwave Motion Sensor, Frosted & Drop Lens, Photocell, Emergency Driver, Beauty Plate, Wireguard

ACCESSORIES

	Emergency Driver
	Motion Sensor
	Beauty Plate
	Drop Lens
	Frosted Lens
	Surge Protector
	Photocell
	Wireguard

SAMPLE NUMBER FX10SCM60SW/8CCT3/BK

FAMILY	SIZE	SERIES	WATTAGE	CRI/COLOR TEMP	COLOR
FX Fixture	10 10-inch	SCM Slim Canopy	60SW 60 Selectable Wattages	8CCT3 CRI 80 Selectable CCT (30/40/50K)	BK Black (WH) White



SLIM CANOPY CCT3

CEILING & AREA LUMINAIRES

ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Size	Color	IP65 Rated	DLC (S/P)	
28	9545	FX10SCM60SW/8CCT3/BK	3CCT	3,584	100-250	10" x 10"	Black	•	P	
45				(30/40/50K)						5,760
57										7,318
28	9547	FX10SCM60SW/8CCT3/WH	3CCT	3,584	100-250	10" x 10"	White	•	P	
45				(30/40/50K)						5,760
57										7,318
60	9546	FX13SCM100SW/8CCT3/BK	3CCT	7,506	>400	13" x 13"	Black	•	P	
80				(30/40/50K)						10,008
100										12,533

ACCESSORIES (Ordered Separately)

Motion Sensor



P10438 SEN-HB001VCR-1
(Microwave Motion Sensor 0-10V Internal 12V)

Emergency Driver



7336 BAEM4-60BC/MV-A
(Emergency Driver for 60SW-10")



7334 BAEM15-48BC/MV-A
(Emergency Driver for 100SW-13")

Photocell



P10036 SEN-PHO-BT-MT/MV
(Button Photocell 120V-277)

Beauty Plates



P10195 PLT-SCM/14X14/WH
(14" x 14" Beauty Plate used with SCM)

P10196 PLT-SCM/24X24/WH
(24" x 24" Beauty Plate used with SCM)

Frosted Lens



P10125 LENS-SCM/FR9X9
(Frosted Lens for SCM for 10")

Drop Lens



P10126 LENS-SCM/DR9X9
(Drop Lens for SCM for 10")

Surge Protector



P10389 SPD-L-10KV-277
(Surge Protection 10KV 120-277V)



P10390 SPD-L-20KV-277
(Surge Protection 20KV 120-277V)



P10391 SPD-L-20KV-480
(Surge Protection 20KV 347-480V)

Wireguard





P10574 WG-SCM10
(Wireguard for 10" SCM)



P10575 WG-SCM13
(Wireguard for 13" SCM)

DIMENSIONS



60SW- 10"x10"
5.51-lbs

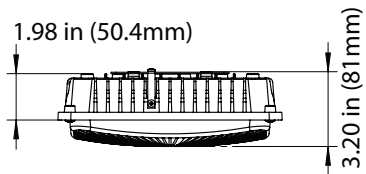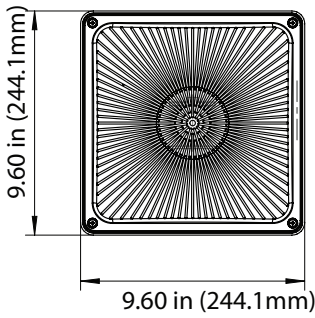



100SW-13"x13"
7.72-lbs

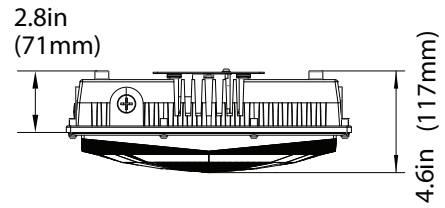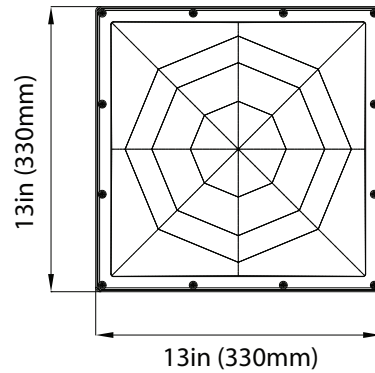

60SW with Frosted Lens Cover (P10125)

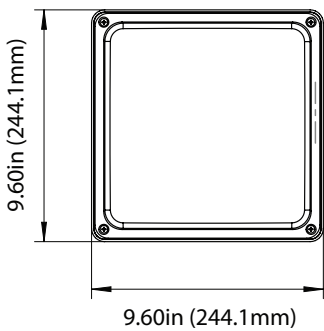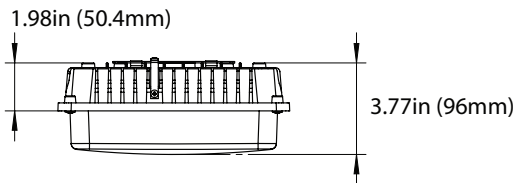


60SW with Drop Lens (P10126)

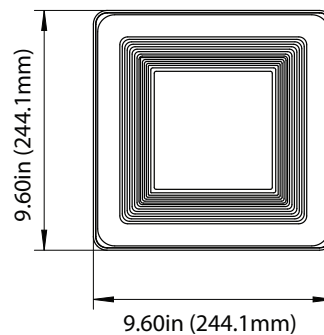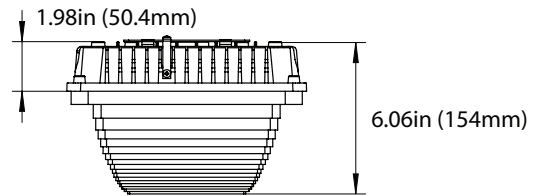


DIMENSIONS

Wireguard for 10" SCM

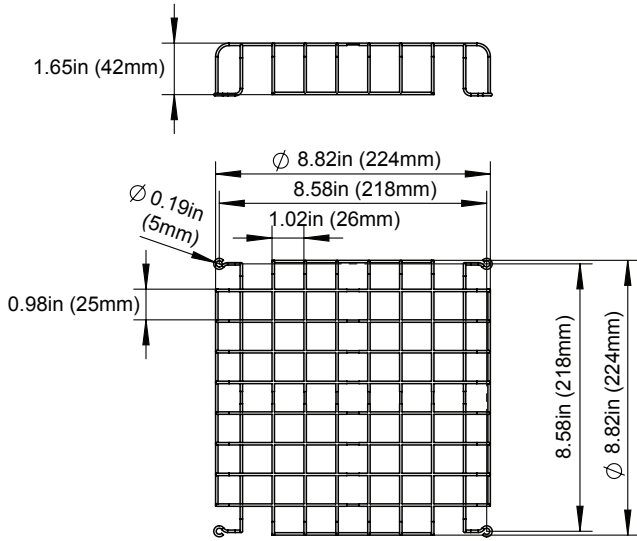


Wireguard for 13" SCM

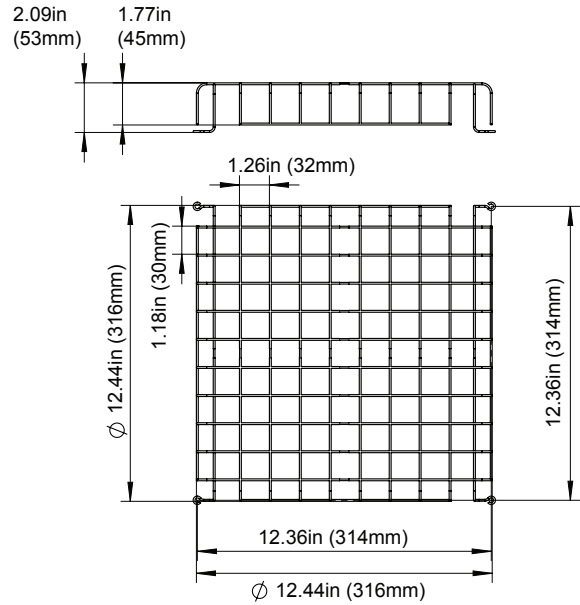

PHOTOMETRICS CHART


28/45/57 Watt
10" Canopy DLC Premium

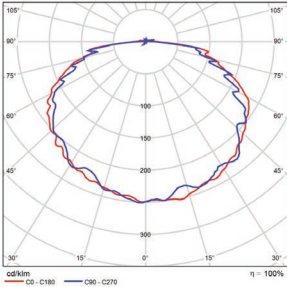

Center Beam fc	Beam Width	
300 fc	14.3 ft	12.6 ft
75.1 fc	28.6 ft	25.3 ft
33.4 fc	42.9 ft	37.9 ft
18.8 fc	57.1 ft	50.5 ft
12.0 fc	71.4 ft	63.1 ft
8.35 fc	85.7 ft	75.8 ft

■ Vert. Spread: 141.4°
■ Horiz. Spread: 136.8°


28/45/57 Watt
10" Canopy + P10125 Frosted Lens

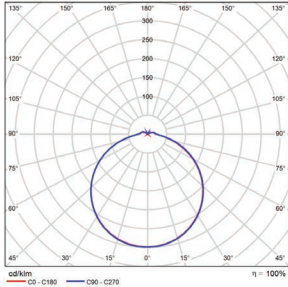

Center Beam fc	Beam Width	
314 fc	8.4 ft	8.5 ft
78.5 fc	16.9 ft	17.0 ft
34.9 fc	25.3 ft	25.5 ft
19.6 fc	33.7 ft	33.9 ft
12.6 fc	42.2 ft	42.4 ft
8.72 fc	50.6 ft	50.9 ft

■ Vert. Spread: 118.7°
■ Horiz. Spread: 119.0°


28/45/57 Watt
10" Canopy + P10126 Drop Lens

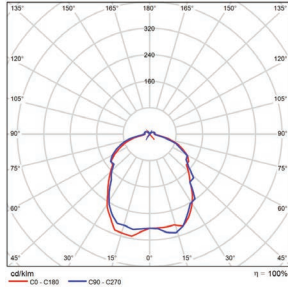

Center Beam fc	Beam Width	
319 fc	5.6 ft	5.5 ft
79.8 fc	11.3 ft	11.1 ft
35.4 fc	16.9 ft	16.6 ft
19.9 fc	22.5 ft	22.1 ft
12.8 fc	28.2 ft	27.7 ft
8.86 fc	33.8 ft	33.2 ft

■ Vert. Spread: 96.9°
■ Horiz. Spread: 95.8°

60/80/100 Watt
13" Canopy DLC Premium

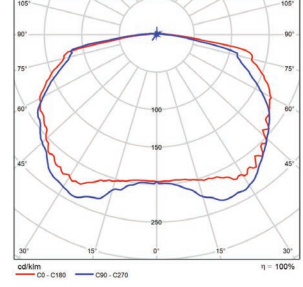

Center Beam fc	Beam Width	
374 fc	19.0 ft	16.4 ft
93.5 fc	37.9 ft	32.8 ft
41.6 fc	56.9 ft	49.2 ft
23.4 fc	75.9 ft	65.6 ft
15.0 fc	94.9 ft	82.0 ft
10.4 fc	113.8 ft	98.4 ft

■ Vert. Spread: 150.5°
■ Horiz. Spread: 146.1°

PACKAGE

Case Qty 1 pc

