

SCM SLIM CANOPY LARGE 13" x 13"

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® slim canopy large is DLC Premium listed and ETL with a rating of IP65. Aesthetically pleasing construction, low-profile design with die-cast aluminum housing and shatter-resistant polycarbonate prismatic lens. Dustproof, sealed structure, 1/2" NPT threaded conduit entrances on each side. This fixture comes with optional motion sensor providing: step dimming, area sensitivity, standby time and on/off. The canopy supports both pendant mounting and direct surface mounting ceiling and wall. The Slim Canopy fixture can be Pendant Mounted and accepts a 3/4" NPT threaded and can be mounted to multiple types of J-boxes.



Rated Life 50,000 Hours
Warranty 5 Years


APPLICATIONS

Warehouses, Parking Garages, Offices, Factories, Hospitals, Hotels

FEATURES

- DLC Premium Qualified
- IP65 Rated
- ETL Listed
- ColorTemp: 4000K, 5000K
- Voltage: 120-277V
- Powerfactor >0.9
- Surge Protection: 4KV
- Beam Angle: 160°
- Dimmable: 1-10V
- CRI: >80
- Operating temperature: -22°F -131°F
- Material: aluminum die-cast
- Shatter-resistant polycarbonate lens
- Color: Black
- 5 Year Warranty
- Optional for Purchase: Emergency Driver, Motion Sensor, Beauty Plate

DISTRIBUTION PATTERN

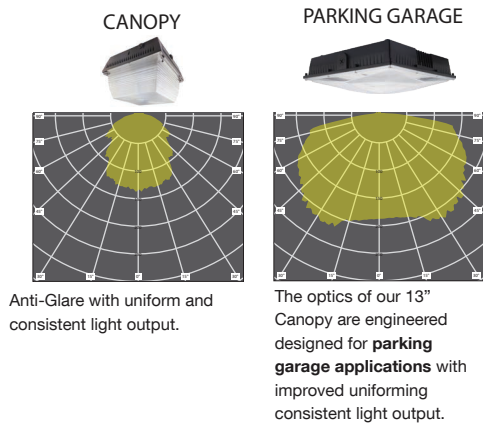

ACCESSORIES

- Beauty Plate
- Emergency Driver
- Motion Sensor
- Surge Protection

SAMPLE NUMBER LED-FXSCM85/40K/BK

STYLE	FAMILY	SERIES	WATTAGE	COLOR TEMP	COLOR
LED LED Lighting	FX Fixture	SCM Slim Canopy	85 <85 Watt	40K 4000K	BK Black



SLIM CANOPY LARGE 13" x 13"

CEILING & AREA LUMINAIRES

ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Dim (V)	Size	IP65 Rated	DLC (S/P)
82	9248	LED-FXSCM85/40K/BK	4000K	10,062	400	1-10V	13"x13"	•	P
82	9249	LED-FXSCM85/50K/BK	5000K	10,259	400	1-10V	13"x13"	•	P
100	9211	LED-FXSCM100/40K/BK	4000K	12,795	>400	1-10V	13"x13"	•	P
100	9212	LED-FXSCM100/50K/BK	5000K	13,022	>400	1-10V	13"x13"	•	P

ACCESSORIES (Ordered Separately)

Emergency Driver



7334 BAEM15-48BC/MV-A
(Emergency Backup Driver 120-277V)

Beauty Plates



P10195 PLT-SCM/14X14/WH
(14"x14" Beauty Plate used with SCM)



P10196 PLT-SCM/24X24/WH
(24"x24" Beauty Plate used with SCM)

Surge Protection



P10389 SPD-L-10KV-277
(Surge Protection 10KV 120-277V)



P10390 SPD-L-20KV-277
(Surge Protection 20KV 120-277V)


Motion Sensor



P10234 SEN-MC605V-D
(Built-In Motion Sensor 120-277V)


DIMENSIONS

82W 8.45-lbs
100W 11.00-lbs

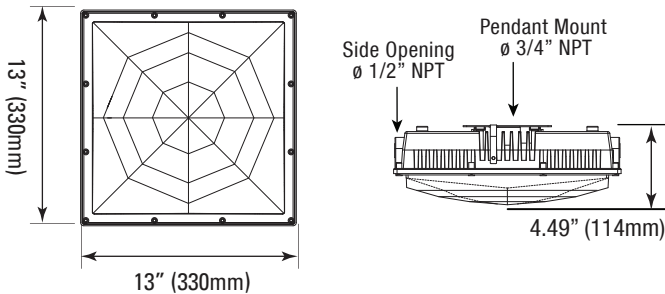

PHOTOMETRICS CHART


82 Watt
DLC Premium



Center Beam Fc	Beam Width	
3.3R	176 fC	21.9 ft 36.0 R
6.7R	42.7 fC	56.7 ft 73.1 R
10.0R	19.2 fC	84.6 ft 109.0 R
13.3R	10.8 fC	112.5 ft 145.0 R
16.7R	6.88 fC	141.3 ft 182.1 R
20.0R	4.80 fC	169.2 ft 218.1 R

■ Vert. Spread: 153.4°
■ Horiz. Spread: 159.2°

100 Watt
DLC Premium



Center Beam Fc	Beam Width	
3.3R	211 fC	31.1 ft 32.9 R
6.7R	51.1 fC	75.3 ft 66.0 R
10.0R	22.9 fC	112.4 ft 99.7 R
13.3R	13.0 fC	149.5 ft 132.6 R
16.7R	8.22 fC	187.8 ft 166.5 R
20.0R	5.73 fC	224.9 ft 199.4 R

■ Vert. Spread: 159.8°
■ Horiz. Spread: 157.3°

PACKAGE

Case Qty 1 pc

