

BAEM25-170BC/347-C




| | |
|---------------|---|
| Order Code | 7337 |
| Input Voltage | 120~347 Vac |
| Frequency | 50/60 Hz |
| Input Current | 200mA Max |
| Weight | 2.67 lbs |
| Dimension | 314x58x38mm (12.36x2.28x1.5in) + 330mm(13in) conduit |

Electrical Characteristics

| | |
|-----------------------------------|---------------------------------|
| Output Voltage | 170 Vdc |
| Output Current | 147mA |
| Output Power | 25W Max |
| Charge Current | 200mA |
| Charging Time | 24 Hours Minimum |
| Discharging Time | 90 Minutes Minimum |
| Operation Environment Temperature | 32F ~122F |
| Battery Life | 500 cycles |
| Primary Application | Indoor, Commercial, Residential |
| Certifications | UL 924, CEC (BC Mark) |

Wiring Diagram

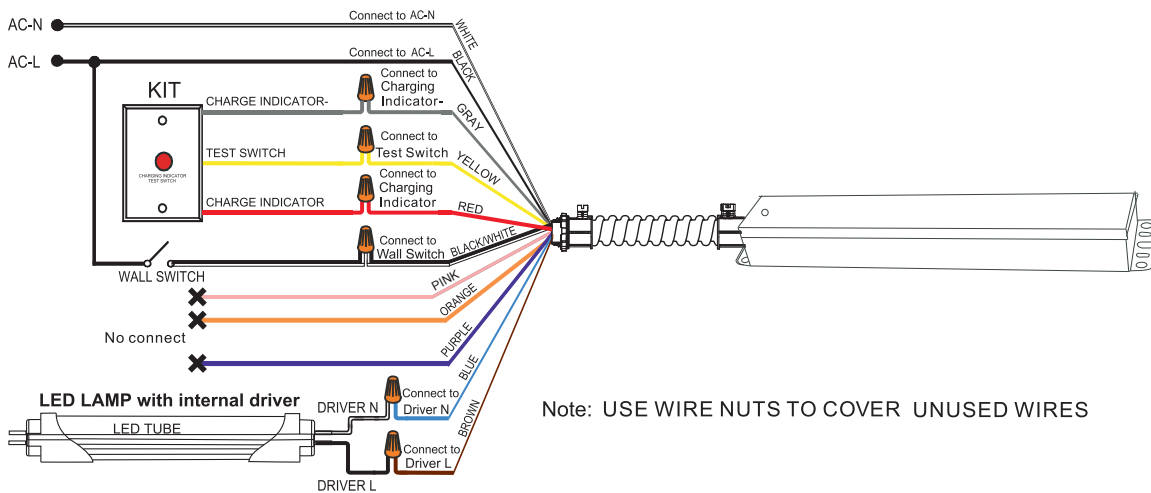

Cautions & Warnings: Contains Lithium. Rechargeable Battery. Must be recycled or disposed properly.

Warning: To prevent high voltage from being present on LED (-) lead proper to installation, battery pack must be disconnect. Do not connect battery pack until installation is complete and AC power is supplied to the emergency driver.