

PROJECT:	
SCHEDULE:	DATE:
PREPARE BY:	
NOTES:	

## T8 U-BEND (Type A + B)

### DESCRIPTION

naturaLED® T8 U-Bend Type A + B fitting into your existing linear fluorescent fixture without the need to reinstall. Simply plug-and-play with Type A compatibility, or bypass the ballast for Type B luminaries. Replaces 32-watt fluorescent tubes according to the existing system. Fast and easy LED upgrade with better quality of light instant-on provides 2X longer lifespan than fluorescents.



### APPLICATIONS

Retails, Restaurants, Hospitalities, Offices, Schools, Industrial Shop



**Rated Life 50,000 Hours**  
**Warranty 5 Years**

### FEATURES

- DLC Standard
- UL/cUL Listed
- NSF Certified
- Color Temperature: 5CCT(3000/3500/4000/5000/6500K)
- Voltage: 120-277V or FL Ballast\*
- Input Current: 0.1A
- Power Factor: >0.9
- Beam Angle: 210°
- CRI: >80
- Operating temperature: - 4°F - 113°F
- Instant On
- Base: G13
- Length: 2-ft
- 5 Year Warranty
- 50,000 hrs rated average life

### SAMPLE NUMBER LED15SWT8U/24FR22/8CCT5AB/UNV

STYLE	WATTAGE	SERIES	LENGTH/WATTAGE	CRI/COLOR TEMP	TYPE
LED	15SW	T8U	24FR22	8CCT5	AB/UNV
LED Lighting	15 Selectable Wattage	T8 U-Bend Tubes	24-inch Frosted <2,200 lumens	CRI 80 Selectable Color Temp (3000/3500/4000/5000/6500K)	Type A+B Universal



# TUBE T8 U-BEND TYPE A + B

TUBE LUMINAIRES


## ORDERING

\*P= Premium DLC / \*S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Efficacy (lm/w)	DLC (S/P)
11.5	<b>4614</b>	LED15SWT8U/24FR22/8CCT5/AB/UNV	5CCT	(@40-65K)	(@40-65K)	S
13			(30/35/40/	1,800 / 2,000 / 2,200	150lm/W	
15			50/65K)	(@30-35K)	(@30-35K)	
				1,700/ 1,900/ 2,100	140lm/W	

## DIMENSIONS

15W (2-ft) 0.54-lbs (245g)

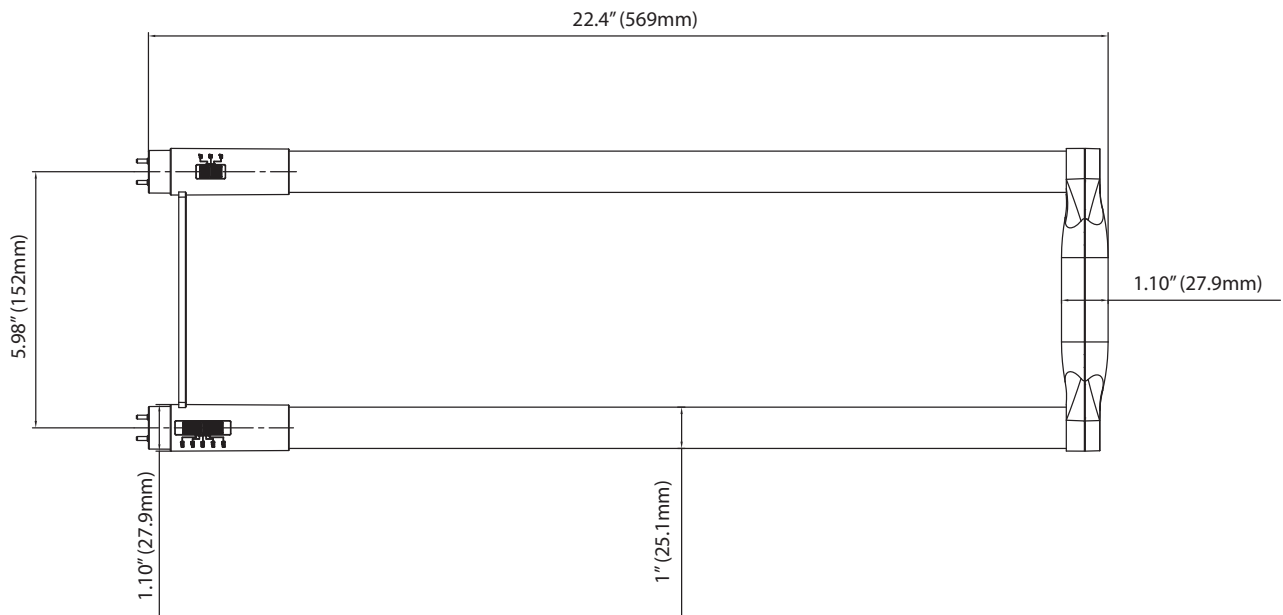

## PACKAGE

### Case Qty

10 pcs

