


Version	1.0	Date	4/13/23
Prepared By	JC		

PRODUCT SPECIFICATION	
Category	LED T8 U-Bend (Type A+B)
Item Number	4614
Stock Code	LED15SWT8U/24FR22/8CCT5AB/UNV
Base	G13 Socket
Housing Color	White + Inner Coated Glass

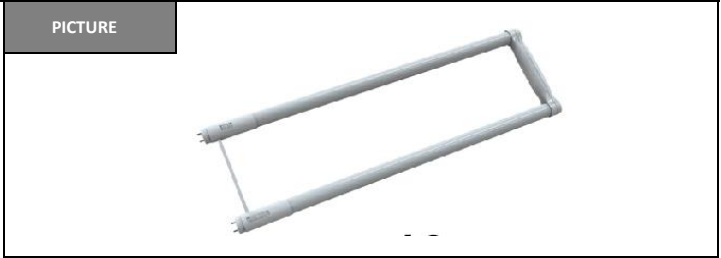

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	11.5/13/15	Replacement Wattage (W)	32
Tested Wattage (W)	11.5/13/15		
Input Voltage (V)	120-277V /FL Ballast	Surge Protect Level	1KV
Voltage Frequency (Hz)	50/60	Dimmable	Yes*
Input Current (A)	0.1	AUX (12V) Line	-
Power Factor	>0.9		
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	1,800/2,000/2,200 (@40~65K) 1,700/1,900/2,100 (@30~35K)	CCT (K)	5CCT (30/35/40/50/65K)
Efficacy (lm/w)	147	Beam Angle (°)	210°
CRI	80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-4°F ~ 113°
Storage Temperature (°F)	-40°F ~ 185°
IP Rating	Damp Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description

PRODUCT DIMENSIONS		
Diameter- in / (mm)	1.20" 25.1	
Length- in / (mm)	22.40" 570	
Distance of tubes- in / (mm)	6.00" 152	
U-shape Width-in/(mm)	1.10" 28	
Weight (lbs)	0.54	
Mounting Height (ft)	-	
Cable Length (ft)	-	

CERTIFICATIONS			
UL/ETL	UL/cUL	CEC	
NSF/ETL Sanitation	NSF	JA8	
Energy Star		FCC	✓
DLC	5.1 Standard	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS
*need external dimming device