

Version	2.0	Date	8/21/18
Prepared By	JC		

**PRODUCT SPECIFICATION**

<b>Category</b>	Slim Canopy
<b>Item Number</b>	7564
<b>Stock Code</b>	LED-FXSCM70/50K/BK-SEN
<b>Mounting</b>	Ceiling
<b>Housing Color</b>	Black



ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	70	Replacement Wattage (W)	250
Tested Wattage (W)	70		
Input Voltage (V)	120-277V	Surge Protect Level	-
Voltage Frequency (Hz)	50/60	Dimmable	1-10V
Input Current (A)	-	AUX (12V) Line	-
Power Factor	>0.9		
THD	<20%		


PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	5,900	CCT (K)	5000K
Efficacy (lm/w)	84	Beam Angle (°)	140°
CRI	>70		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-22°F ~ 113°F
Storage Temperature (°F)	-40°F ~ 140°F
IP Rating	IP65
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description

**PRODUCT DIMENSIONS**

Width- in / (mm)	9.65"      245
Height- in / (mm)	3.35"      85
Depth- in / (mm)	9.65"      245
EPA (ft²)	-
Weight (lbs)	6.6
Mounting Height (ft)	-
Cable Length (ft)	-

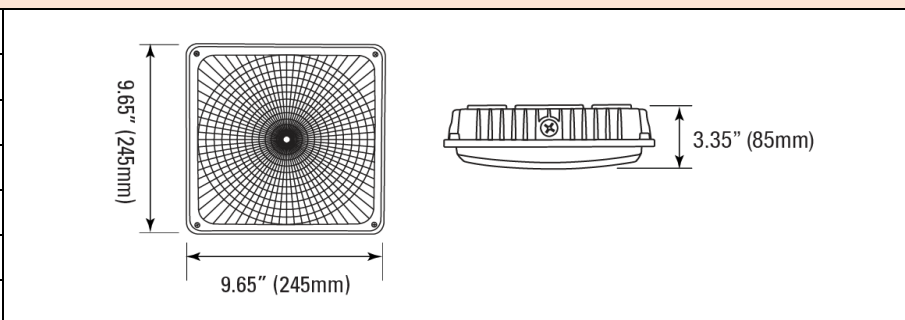

CERTIFICATIONS			
UL/ETL	ETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC		RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

**COMMENTS**

Motion Sensor Included