

Version	2.0	Date	8/21/19
Prepared By	JC		

**PRODUCT SPECIFICATION**

<b>Category</b>	Slim Area Light
<b>Item Number</b>	7638
<b>Stock Code</b>	LED-FXSAL240/40K/WH/3S
<b>Mounting</b>	EA6/SB/SF/WM/PM/Yoke Mount
<b>Housing Color</b>	White



ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	240	Replacement Wattage (W)	750-1000
Tested Wattage (W)	242.5		
Input Voltage (V)	120-277V	Surge Protect Level	12KV
Voltage Frequency (Hz)	50/60	Dimmable	1-10V
Input Current (A)	2.1	AUX (12V) Line	-
Power Factor	>0.9		
THD	<20%		


PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	28,828	CCT (K)	4000K
Efficacy (lm/w)	119	Beam Angle (°)	Type 3
CRI	>70		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-40°F ~ 122°
Storage Temperature (°F)	-40°F ~ 140°F
IP Rating	IP65
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
K141030	REC3PLK/PHO	Photocell

**PRODUCT DIMENSIONS**

Width- in / (mm)	14.96"      380
Height- in / (mm)	3.00"      76.2
Depth- in / (mm)	21.57"      548
EPA (ft²)	-
Weight (lbs)	24.5
Mounting Height (ft)	-
Cable Length (ft)	1.97

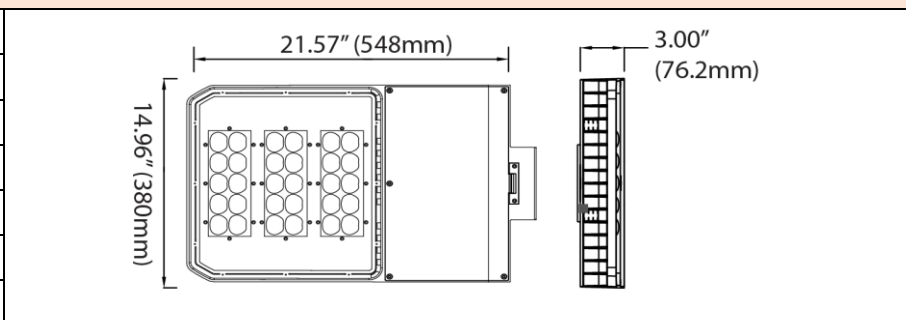

CERTIFICATIONS			
UL/ETL	ETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Premium	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

**COMMENTS**

--