


|             |     |      |        |
|-------------|-----|------|--------|
| Version     | 2.0 | Date | 8/2/23 |
| Prepared By | JC  |      |        |

| PRODUCT SPECIFICATION |                             |
|-----------------------|-----------------------------|
| Category              | Bollard                     |
| Item Number           | 7668                        |
| Stock Code            | FX5.5BLD18SW/42RLF/8CCT3/BZ |
| Mounting              | Ground Mounting             |
| Housing Color         | Bronze (RAL#8019)           |

PICTURE

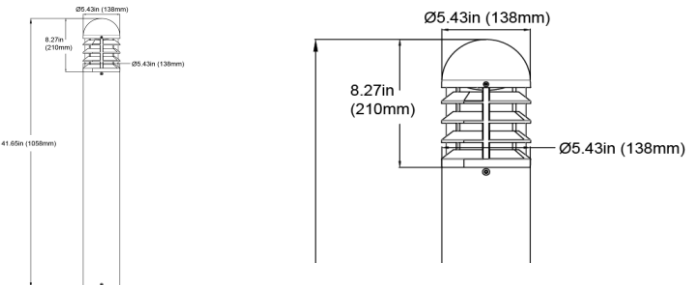


| ELECTRICAL CHARACTERISTICS |          |                         |       |
|----------------------------|----------|-------------------------|-------|
| Rated Wattage (W)          | 10/15/18 | Replacement Wattage (W) | 100   |
| Tested Wattage (W)         | 10/15/18 |                         |       |
| Input Voltage (V)          | 120-277V | Surge Protect Level     | 10KV  |
| Voltage Frequency (Hz)     | 50/60    | Dimmable                | 0-10V |
| Input Current (A)          | 0.16     | AUX (12V) Line          | -     |
| Power Factor               | >0.9     |                         |       |
| THD                        | <20%     |                         |       |

| PHOTOMETRIC CHARACTERISTICS |       |                |                 |
|-----------------------------|-------|----------------|-----------------|
| Lumen (lm)                  | 600   | CCT (K)        | 3CCT(30/40/50K) |
|                             | 900   |                |                 |
|                             | 1,080 |                |                 |
| Efficacy (lm/w)             | 50    | Beam Angle (°) | 360°            |
| CRI                         | >80   |                |                 |

| GENERAL CHARACTERISTICS    |               |
|----------------------------|---------------|
| Operating Temperature (°F) | -40°F ~ 122°F |
| Storage Temperature (°F)   | -40°F ~ 140°F |
| IP Rating                  | IP65          |
| Rated Life (Hrs)           | 50,000        |
| Warranty (Yrs)             | 5             |

| ACCESSORIES |            |             |
|-------------|------------|-------------|
| Item #      | Stock Code | Description |
|             |            |             |
|             |            |             |
|             |            |             |
|             |            |             |
|             |            |             |
|             |            |             |

| PRODUCT DIMENSIONS           |               |  |
|------------------------------|---------------|--|
| Diameter of head - in / (mm) | 5.50" / 140.5 |  |
| Diameter of body - in / (mm) | 5.50" / 140.5 |  |
| Length- in / (mm)            | 41.6" / 1056  |  |
| EPA (ft²)                    | -             |  |
| Weight (lbs)                 | -             |  |
| Mounting Height (ft)         | -             |  |
| Cable Length (ft)            | -             |  |

| CERTIFICATIONS     |          |      |   |
|--------------------|----------|------|---|
| UL/ETL             | ETL/cETL | CEC  |   |
| NSF/ETL Sanitation |          | JA8  |   |
| Energy Star        | ✓        | FCC  | ✓ |
| DLC                |          | RoHs | ✓ |

| DOCUMENTS |   |             |   |
|-----------|---|-------------|---|
| LM79      | ✓ | IES File    | ✓ |
| LM80      | ✓ | Dimmer List |   |
|           |   |             |   |
|           |   |             |   |

| COMMENTS |
|----------|
|          |