


Version	2.0	Date	8/28/19
Prepared By	JC		

PRODUCT SPECIFICATION		PICTURE
Category	Downlight	
Item Number	7689	
Stock Code	LED4RL9-54L940	
Mounting	4" Recessed	
Housing Color	White	


ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	9	Replacement Wattage (W)	60
Tested Wattage (W)	9		
Input Voltage (V)	120V	Surge Protect Level	-
Voltage Frequency (Hz)	60	Dimmable	Yes
Input Current (A)	0.8	AUX (12V) Line	-
Power Factor	>0.9		
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	540	CCT (K)	4000K
Efficacy (lm/w)	-	Beam Angle (°)	Flood
CRI	>90		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-4°F ~ 104°
Storage Temperature (°F)	-4°F ~ 113°
IP Rating	Damp Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
P10170	RT-4RL9-BK	Black Round Trim
P10172	RT-4RL9-CH-WH	Chrome/White Round Trim
P10171	RT-4RL9-CH	Chrome Round Trim
7337	BAEM25-170BC/347-C	25W Micro Inverter 120-347V with 12" Conduit

PRODUCT DIMENSIONS		
Width- in / (mm)	5.00"	127
Height- in / (mm)	3.50"	88.9
Depth- in / (mm)	-	-
EPA (ft²)	-	-
Weight (lbs)	0.93	
Mounting Height (ft)	-	
Cable Length (ft)	-	

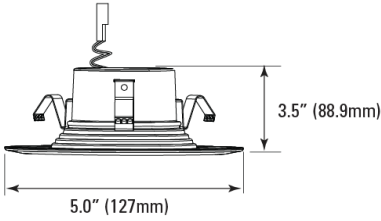

CERTIFICATIONS			
UL/ETL	UL	CEC	
NSF/ETL Sanitation		JA8	✓
Energy Star	✓	FCC	✓
DLC		RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS