


Version	2.0	Date	1/10/19
Prepared By	JC		

PRODUCT SPECIFICATION	
Category	Downlight
Item Number	7691
Stock Code	LED6RL15-110L930
Mounting	Recessed
Housing Color	White

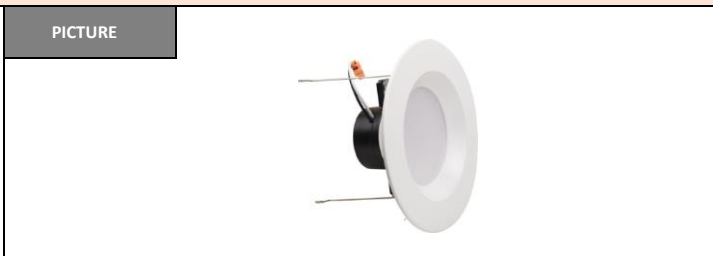


ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	15	Replacement Wattage (W)	120
Tested Wattage (W)	15		
Input Voltage (V)	120V	Surge Protect Level	-
Voltage Frequency (Hz)	60	Dimmable	Yes
Input Current (A)	0.13	AUX (12V) Line	-
Power Factor	>0.9		
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	1,100	CCT (K)	3000K
Efficacy (lm/w)	-	Beam Angle (°)	Flood
CRI	>90		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-4°F ~ 104°
Storage Temperature (°F)	-4°F ~ 113°
IP Rating	Damp Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
P10173	RT-6RL15-BK	Black Round Trim
P10175	RT-6RL15-CH-WH	Chrome/White Round Trim
P10174	RT-6RL15-CH	Chrome Round Trim
P10177	RTS-6RL15-WH	White Square Trim
7337	BAEM25-170BC/347-C	25W Micro Inverter 120-347V with 12" Conduit

PRODUCT DIMENSIONS		
Width- in / (mm)	7.50"	190
Height- in / (mm)	3.80"	96.5
Depth- in / (mm)	-	-
EPA (ft²)	-	
Weight (lbs)	1.19	
Mounting Height (ft)	-	
Cable Length (ft)	-	

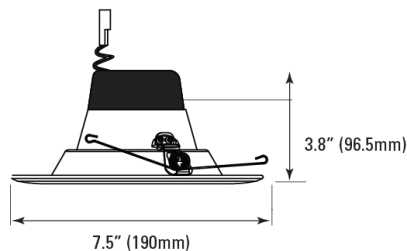

CERTIFICATIONS			
UL/ETL	UL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star	✓	FCC	✓
DLC		RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS