

Version	2.0	Date	1/9/19
Prepared By	JC		

	PRODU	CT:
Category	Troffer	
Item Number	9236	
Stock Code	LED-FXTF20/2x2/840G1	
Mounting	Ceiling	
Housing Color	White	




ELECTRICAL CHARACTERISTICS				
Rated Wattage (W)	20			
Tested Wattage (W)	20	Replacement Wattage (W)	60-70	
Input Voltage (V)	120-277V			
Voltage Frequency (Hz)	50/60	Surge Protect Level	1KV	
Input Current (A)	0.17	Dimmable	1-10V	
Power Factor	>0.9	AUX (12V) Line	-	
THD	<20%			

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	2,620	ССТ (К)	4000K
Efficacy (lm/w)	131	Beam Angle (°)	120°
CRI	>80		

GENERAL CHARACTERISTICS			
Operating Temperature (°F)	-4°F ~ 104°		
Storage Temperature (°F)	-4°F ~ 140°		
IP Rating	Damp Location		
IK Rating	-		
Rated Life (Hrs)	50,000		
Warranty (Yrs)	5		

ACCESSORIES			
Item#	Stock Code	Description	
K7334225	FXTF-BAEM-MT	Emergency Driver with Mounting Plate	
K225234	PLT/FXTF/MC605	Microwave Motion Sensor	

Width- in / (mm)	23.70"	603	
Height- in / (mm)	23.70"	603	
Depth- in / (mm)	3.50"	90	
IK Rating		-	
Weight (lbs)	4.1		
Mounting Height (ft)	8~10		
Cable Length (ft)		-	

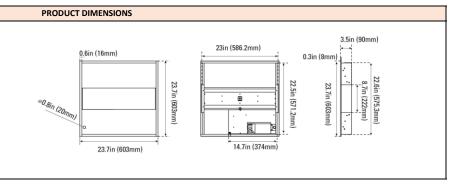

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Standard	RoHs	√

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS