

Version	2.0	Date	1/9/19
Prepared By	JC		

		PRODUCT
Category	Troffer	
Item Number	9238	
Stock Code	LED-FXTF30/2x4/835G1	
Mounting	Ceiling	
Housing Color	White	




	ELECTRICAL CHA	ARACTERISTICS	
Rated Wattage (W)	30		
Tested Wattage (W)	30	Replacement Wattage (W)	90-100
Input Voltage (V)	120-277V		
Voltage Frequency (Hz)	50/60	Surge Protect Level	1KV
Input Current (A)	0.26	Dimmable	1-10V
Power Factor	>0.9	AUX (12V) Line	-
THD	<20%		

	PHOTOMETRIC C	HARACTERISTICS	
Lumen (lm)	3,810	ССТ (К)	3500K
Efficacy (lm/w)	127	Beam Angle (°)	120°
CRI	>80		

	GENERAL CHARACTERISTICS
Operating Temperature (°F)	-4°F ~ 104°
Storage Temperature (°F)	-4°F ~ 140°
IP Rating	Damp Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

	ACCES	SORIES
Item#	Stock Code	Description
K7334225	FXTF-BAEM-MT	Emergency Driver with Mounting Plate
K225234	PLT/FXTF/MC605	Microwave Motion Sensor

Width- in / (mm)	47.70"	1212
Height- in / (mm)	23.70"	603
Depth- in / (mm)	3.50"	90
IK Rating		-
Weight (lbs)		6.5
Mounting Height (ft)		8~10
Cable Length (ft)		-

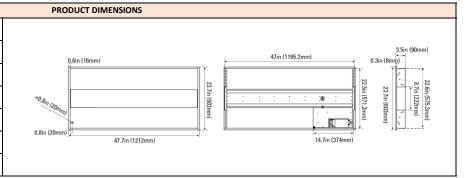

	CERTIFIC	ATIONS	
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Standard	RoHs	✓

	DOCU	MENTS	
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS
