

Version	2.0	Date	1/9/19
Prepared By	JC		

**PRODUCT SPECIFICATION**

<b>Category</b>	Troffer
<b>Item Number</b>	9240
<b>Stock Code</b>	LED-FXTF30/2x4/850G1
<b>Mounting</b>	Ceiling
<b>Housing Color</b>	White



ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	30	Replacement Wattage (W)	90-100
Tested Wattage (W)	30		
Input Voltage (V)	120-277V	Surge Protect Level	1KV
Voltage Frequency (Hz)	50/60	Dimmable	1-10V
Input Current (A)	0.26	AUX (12V) Line	-
Power Factor	>0.9		
THD	<20%		


PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	3,900	CCT (K)	5000K
Efficacy (lm/w)	130	Beam Angle (°)	120°
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-4°F ~ 104°
Storage Temperature (°F)	-4°F ~ 140°
IP Rating	Damp Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
K7334225	FXTF-BAEM-MT	Emergency Driver with Mounting Plate
K225234	PLT/FXTF/MC605	Microwave Motion Sensor

**PRODUCT DIMENSIONS**

Width- in / (mm)	47.70"	1212
Height- in / (mm)	23.70"	603
Depth- in / (mm)	3.50"	90
IK Rating	-	
Weight (lbs)	6.5	
Mounting Height (ft)	8~10	
Cable Length (ft)	-	

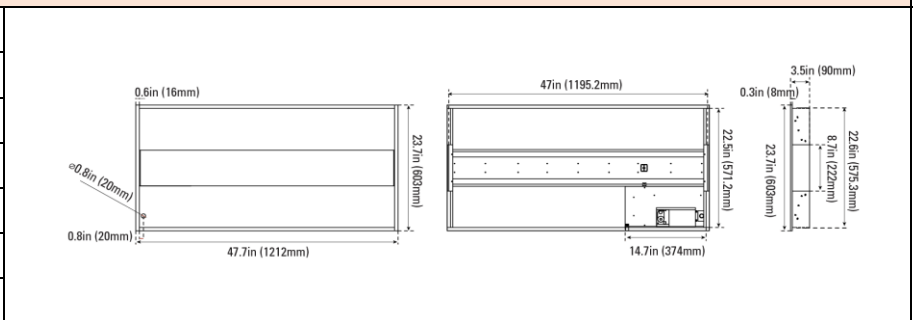

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Standard	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

**COMMENTS**

--