

Version	2.0	Date	4/5/18
Prepared By	JC		

**PRODUCT SPECIFICATION**

<b>Category</b>	Linear High Bay
<b>Item Number</b>	9285
<b>Stock Code</b>	LED-FXHBL150/44FR/840
<b>Mounting</b>	Chain / Yoke Mount
<b>Housing Color</b>	White



**ELECTRICAL CHARACTERISTICS**

Rated Wattage (W)	150	Replacement Wattage (W)	400
Tested Wattage (W)	150		
Input Voltage (V)	120-277V	Surge Protect Level	-
Voltage Frequency (Hz)	50/60	Dimmable	1-10V
Input Current (A)	1.29	AUX (12V) Line	-
Power Factor	>0.9		
THD	<20%		

**PHOTOMETRIC CHARACTERISTICS**

Lumen (lm)	20,032	CCT (K)	4000K
Efficacy (lm/w)	134	Beam Angle (°)	110°
CRI	>80		

**GENERAL CHARACTERISTICS**


Operating Temperature (°F)	-40°F ~ 122°
Storage Temperature (°F)	-40°F ~ 122°
IP Rating	Damp Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

**ACCESSORIES**

Item #	Stock Code	Description
7334	BAEM15-48BC/MV-A	15W Emergency Driver

**PRODUCT DIMENSIONS**

Width- in / (mm)	44" / 1118
Height- in / (mm)	16" / 405
Depth- in / (mm)	2.19" / 56
IK Rating	-
Weight (lbs)	16.53
Mounting Height (ft)	-
Cable Length (ft)	-

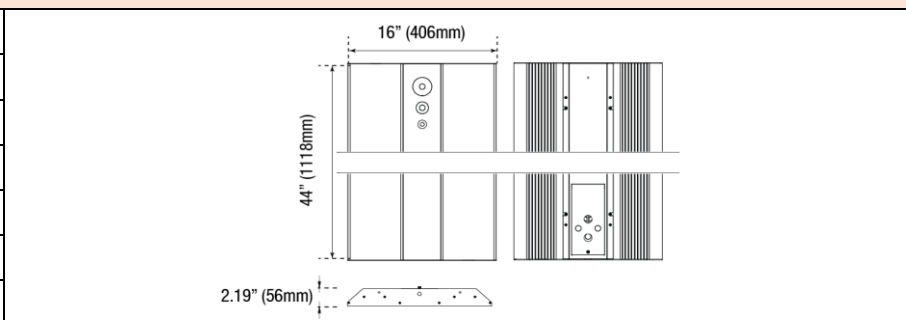

**CERTIFICATIONS**

UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC		RoHs	✓

**DOCUMENTS**

LM79	✓	IES File	✓
LM80	✓	Dimmer List	

**COMMENTS**

--