

| Version | 2.0 | Date | 1/20/20 |
|-------------|-----|------|---------|
| Prepared By | JC | | |

| | | PRODUCT S |
|--------------------------------------|---------------------------------|-----------|
| Category | Floodlight | |
| Item Number 9293 | | |
| Stock Code LED-FXBFS20/40/830/BZ-KNC | | |
| Mounting | Mounting Knuckle Mount 1/2" NPT | |
| Housing Color Bronze | | |




| ELECTRICAL CHARACTERISTICS | | | |
|----------------------------|----------|----------------------------|-----|
| Rated Wattage (W) | 21 | | |
| Tested Wattage (W) | 21.14 | Replacement Wattage (W) | 150 |
| Input Voltage (V) | 120-277V | | |
| Voltage Frequency (Hz) | 50/60 | Surge Protect Level | 2KV |
| Input Current (A) | 0.2 | Dimmable | No |
| Power Factor | >0.9 | AUX (12V) Line | - |
| THD | <20% | | |

| PHOTOMETRIC CHARACTERISTICS | | | |
|-----------------------------|-------|----------------|-------|
| Lumen (Im) | 1,800 | ССТ (К) | 3000K |
| Efficacy (lm/w) | 85 | Beam Angle (°) | 40° |
| CRI | >80 | | |
| | | | |

| GENERAL CHARACTERISTICS | | |
|----------------------------|---------------|--|
| Operating Temperature (°F) | -22°F ~ 122°F | |
| Storage Temperature (°F) | -40°F ~ 158°F | |
| IP Rating | IP65 | |
| Rated Life (Hrs) | 50,000 | |
| Warranty (Yrs) | 5 | |
| | | |

| ACCESSORIES | | | |
|-------------|------------|-------------|--|
| Item # | Stock Code | Description | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

| Width- in / (mm) | 3.38" | 86 |
|----------------------|-------|-----|
| Height- in / (mm) | 3.81" | 97 |
| Depth- in / (mm) | 7.36" | 187 |
| EPA (ft²) | | - |
| Weight (lbs) | | 1.5 |
| Mounting Height (ft) | | - |
| Cable Length (ft) | | - |

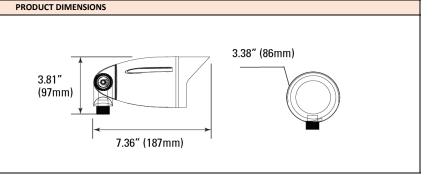

| CERTIFICATIONS | | | |
|--------------------|-----|------|---|
| UL/ETL | ETL | CEC | |
| NSF/ETL Sanitation | | JA8 | |
| Energy Star | ✓ | FCC | ✓ |
| DLC | | RoHs | ✓ |

| DOCUMENTS | | | |
|-----------|---|-------------|---|
| LM79 | ✓ | IES File | ✓ |
| LM80 | ✓ | Dimmer List | |
| | | | |
| | | | |

COMMENTS