

Version	2.0	Date	9/28/21
Prepared By	JC		

PRODUCT SPECIFICATION	
Category	Flush Mount - Modern
Item Number	9356
Stock Code	LED12FMM-126L9CCT5-NI
Mounting	12" Surface
Housing Color	White + Nickel




ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	18	Replacement Wattage (W)	120
Tested Wattage (W)	18		
Input Voltage (V)	120V	Surge Protect Level	2KV
Voltage Frequency (Hz)	60	Dimmable	Yes
Input Current (A)	0.18	AUX (12V) Line	-
Power Factor	>0.9		
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	1,260	CCT (K)	5CCT (27/30/35/40/50K)
Efficacy (lm/w)	-	Beam Angle (°)	Flood
CRI	>90		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-4°F ~ 104°
Storage Temperature (°F)	-4°F ~ 113°
IP Rating	Damp Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
7337	BAEM25-170BC/347-C	25W Micro Inverter 120-347V with 12" Conduit

PRODUCT DIMENSIONS		
Width- in / (mm)	12.13"	308
Height- in / (mm)	3.30"	83.8
Depth- in / (mm)	-	-
EPA (ft²)	-	-
Weight (lbs)	1.72	
Mounting Height (ft)	8~15	
Cable Length (ft)	-	

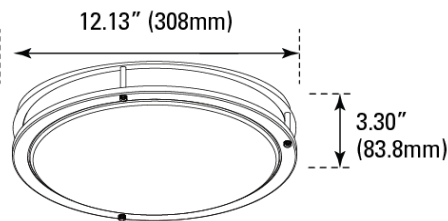

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	✓
NSF/ETL Sanitation		JA8	✓
Energy Star	✓	FCC	✓
DLC		RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	✓

COMMENTS