

Version	2.0	Date	9/28/21
Prepared By	JC		

PRODUCT SPECIFICATION	
Category	Flush Mount - Round
Item Number	9360
Stock Code	LED16FMR-200L9CCT5
Mounting	16" Surface
Housing Color	White




ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	24	Replacement Wattage (W)	150
Tested Wattage (W)	24		
Input Voltage (V)	120V	Surge Protect Level	2KV
Voltage Frequency (Hz)	60	Dimmable	Yes
Input Current (A)	0.24	AUX (12V) Line	-
Power Factor	>0.9		
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	2,000	CCT (K)	5CCT (27/30/35/40/50K)
Efficacy (lm/w)	-	Beam Angle (°)	Flood
CRI	>90		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	5°F ~ 104°
Storage Temperature (°F)	-4°F ~ 113°
IP Rating	Damp Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
P10133	LENS-16FMR	Replacement Lens 16"
7337	BAEM25-170BC/347-C	25W Micro Inverter 120-347V with 12" Conduit

PRODUCT DIMENSIONS		
Width- in / (mm)	16.38"	416
Height- in / (mm)	4.21"	107
Depth- in / (mm)	-	-
EPA (ft²)	-	
Weight (lbs)	2.34	
Mounting Height (ft)	8~15	
Cable Length (ft)	-	

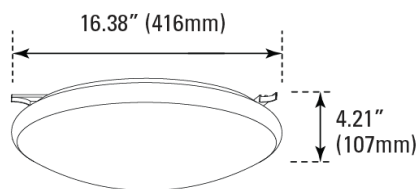

CERTIFICATIONS			
UL/ETL	cETLus	CEC	✓
NSF/ETL Sanitation		JA8	✓
Energy Star	✓	FCC	✓
DLC		RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS