

Version	2.0	Date	5/19/2021
Prepared By	JC		

PRODUCT SPECIFICATION	
Category	Wall Pack
Item Number	9455
Stock Code	FXTWP60SW/CCT3/BZ-PHO
Mounting	Wall Mount
Housing Color	Bronze




ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	28 / 38 / 60	Replacement Wattage (W)	175-400
Tested Wattage (W)	60.96		
Input Voltage (V)	120-277V	Surge Protect Level	4KV
Voltage Frequency (Hz)	50/60		
Input Current (A)	0.24/0.32/0.5	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	-
THD	<20%	Photocell	Included

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	4,200	CCT (K)	3CCT (30/40/50K)
	5,700		
	9,134		
Efficacy (lm/w)	150	Beam Angle (°)	Forward Throw
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-40°F ~ 122°F
Storage Temperature (°F)	-40°F ~ 140°F
IP Rating	IP65
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
7334	BAEM15-48BC/MV-A	15W LED Emergency Driver
P10234	SEN-MC605V-D	Microwave Motion Photocell Sensor
P10403	CVR-TWP-MEDIUM/BZ	Cut-Off Shield-Bronze (medium)
P10003	LENS-TWP-PC-MEDIUM	Plastic Lens with Gasket (medium)
P10000	LENS-TWP-MEDIUM	Borosilicate Glass Lens with Gasket (medium)
P10004	WG-TWP-MEDIUM	Wire Guard (medium)

PRODUCT DIMENSIONS		
Width- in / (mm)	14.3	363
Height- in / (mm)	9.2	234
Depth- in / (mm)	7.51	191
EPA (ft²)	-	
Weight (lbs)	6.86	
Mounting Height (ft)	-	
Cable Length (ft)	-	

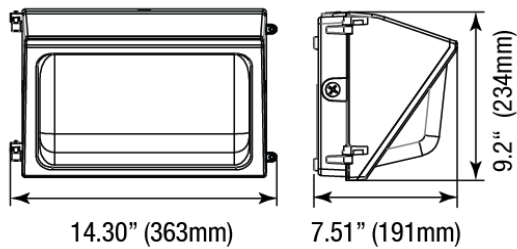

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Premium	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS