


Version	2.0	Date	4/15/22
Prepared By	JC		

**PRODUCT SPECIFICATION**

Category	Commercial Wrap
Item Number	9585
Stock Code	FXCWS44SW/48FR/8CCT3
Mounting	Surface Mount/ Hanging Mount
Housing Color	White

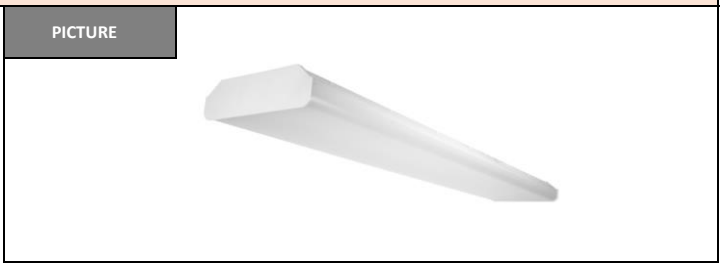

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	22/28/34/44	Replacement Wattage (W)	4 x 32W T8
Tested Wattage (W)	22/28/34/44		
Input Voltage (V)	120-277V	Surge Protect Level	2KV
Voltage Frequency (Hz)	50/50	Dimmable	0-10V
Input Current (A)	0.4A (max)	AUX (12V) Line	Yes
Power Factor	>0.9		
THD	<20%		


PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	3,102	CCT (K)	3CCT (30/40/50K)
	3,920		
	4,726		
	6,063		
Efficacy (lm/w)	138	Beam Angle (°)	110°
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-13°F ~ 104°
Storage Temperature (°F)	-13°F ~ 176°
IP Rating	Damp Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
7336	BAEM4-60BC/MV-A	Emergency Driver
P10438	SEN-HB001VCR-1	12V Motion Sensor Dimming 0-10V
P10157	WG-9CWS44/48/WH	WireGuard
P10016	LENS-CWS44-4FT	Replacement Lens
P10323	SEN-HD06R	Remote Programmer

**PRODUCT DIMENSIONS**

Length- in / (mm)	48"      1219
Height- in / (mm)	2.70"      69
Depth- in / (mm)	9.37"      238
IK Rating	-
Weight (lbs)	11.02
Mounting Height (ft)	10~25
Cable Length (ft)	-

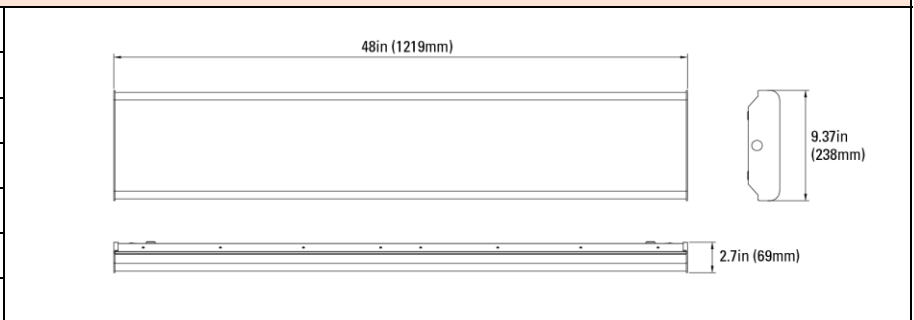

CERTIFICATIONS			
UL/ETL	UL/ cUL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Standard	RoHs	

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

**COMMENTS**

--