


Version	2.0	Date	6/26/24
Prepared By	JC		

PRODUCT SPECIFICATION	
Category	Linear High Bay
Item Number	9687
Stock Code	HBL/150S/22FR/8C3-Z10
Mounting	Chain / Pole / Ceiling Mount
Housing Color	White

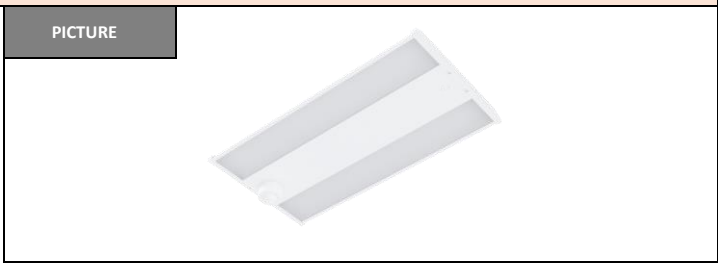

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	90/120/150	Replacement Wattage (W)	400-575
Tested Wattage (W)	90/120/150		
Input Voltage (V)	120-277V	Surge Protect Level	6KV
Voltage Frequency (Hz)	50/60	Dimmable	0-10V
Input Current (A)	0.84	AUX (12V) Line	-
Power Factor	>0.9	Z10 Receptacle	Included

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	12,150 16,200 20,250	CCT (K)	3CCT (35/40/50K)
Efficacy (lm/w)	135	Beam Angle (°)	100°
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	- 40°F ~ 122°
Storage Temperature (°F)	- 40°F ~ 176°
IP Rating	Damp Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
P10518	REC-Z10-WH (included)	Z10 receptacle with white cap
P10520	SEN-ANT-5-Z10-PC	Z10 Photocell
P10521	SEN-ANT-5-Z10	Z10 Microwave Sensor w/ photocell
P10522	SEN-ANT-6-Z10	Z10 PIR Sensor w/ photocell
P10316	SEN-BRI-RC100	Remote Controller for P10521/P10522

PRODUCT DIMENSIONS		
Width- in / (mm)	11.88" 302	
Height- in / (mm)	2.10" 53.5	
Length- in / (mm)	21.88" 556	
IK Rating	-	
Weight (lbs)	5.51	
Mounting Height (ft)	-	
Cable Length (ft)	-	

CERTIFICATIONS			
UL/ETL	ETL / cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Premium	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS

Version	2.0	Date	6/26/24
Prepared By	JC		

ACCESSORIES		
Item #	Stock Code	Description
P10389	SPD-L-10KV-277	10KV Surge Protector 120-277V
P10390	SPD-L-20KV-277	20KV Surge Protector 120-277V
P10391	SPD-L-20KV-480	20KV Surge Protector 347-480V
P10092	MT-YK-HBL22	Yoke Mount with 3/4" NPT for 22" High Bay Linear
P10576	WG-HBL22/WH-G1	Wire Guard for 22" HBL
P10578	ADP-PM-HBL/WH-G1	1/2" & 3/4" Pendant Mount Adapter
7341	BAEM20-260BC/347-A	20W 90-260Vdc Output CEC Compliant Emergency Driver 120-347V