

| Version     | 2.0 | Date | 9/29/17 |
|-------------|-----|------|---------|
| Prepared By | JC  |      |         |

|               | PRODUCT             |
|---------------|---------------------|
| Category      | Wall Sconce Up/Down |
| Item Number   | 7023                |
| Stock Code    | LED-FXDWS20/830/NI  |
| Mounting      | Wall                |
| Housing Color | Nickel              |




| ELECTRICAL CHARACTERISTICS |       |                            |     |  |
|----------------------------|-------|----------------------------|-----|--|
| Rated Wattage (W)          | 20    |                            |     |  |
| Tested Wattage (W)         | 20    | Replacement<br>Wattage (W) | 200 |  |
| Input Voltage (V)          | 120V  |                            |     |  |
| Voltage Frequency (Hz)     | 50/60 | Surge Protect Level        | -   |  |
| Input Current (A)          | 0.2   | Dimmable                   | -   |  |
| Power Factor               | >0.9  | AUX (12V) Line             | -   |  |
| THD                        | <20%  |                            |     |  |

| PHOTOMETRIC CHARACTERISTICS |       |                |       |
|-----------------------------|-------|----------------|-------|
| Lumen (Im)                  | 1,400 | ССТ (К)        | 3000K |
| Efficacy (lm/w)             | -     | Beam Angle (°) | 38°   |
| CRI                         | >80   |                |       |
|                             |       |                |       |

| GENERAL CHARACTERISTICS               |              |  |
|---------------------------------------|--------------|--|
| Operating Temperature (°F)            | - 4°F ~ 104° |  |
| Storage Temperature (°F) - 4°F ~ 122° |              |  |
| IP Rating                             | Wet Location |  |
| IK Rating                             | -            |  |
| Rated Life (Hrs)                      | 50,000       |  |
| Warranty (Yrs)                        | 5            |  |

| ACCESSORIES |            |             |  |
|-------------|------------|-------------|--|
| Item #      | Stock Code | Description |  |
|             |            |             |  |
|             |            |             |  |
|             |            |             |  |
|             |            |             |  |
|             |            |             |  |

| Width- in / (mm)     | 5"     | 127  |
|----------------------|--------|------|
| Height- in / (mm)    | 11.70" | 297  |
| Depth- in / (mm)     | 3.94"  | 100  |
| EPA (ft²)            |        | -    |
| Weight (lbs)         | 2      | 1.43 |
| Mounting Height (ft) |        | -    |
| Cable Length (ft)    |        | -    |

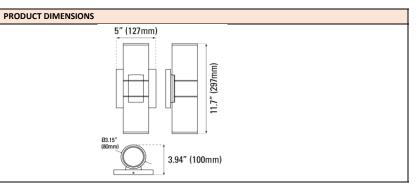

| CERTIFICATIONS     |     |      |  |
|--------------------|-----|------|--|
| UL/ETL             | ETL | CEC  |  |
| NSF/ETL Sanitation |     | JA8  |  |
| Energy Star        | ✓   | FCC  |  |
| DLC                |     | RoHs |  |

| DOCUMENTS |   |             |   |
|-----------|---|-------------|---|
| LM79      | ✓ | IES File    | ✓ |
| LM80      | ✓ | Dimmer List |   |
|           |   |             |   |
|           |   |             |   |

| COMMENTS |  |
|----------|--|
|          |  |
|          |  |