

|             |     |      |        |
|-------------|-----|------|--------|
| Version     | 2.0 | Date | 4/5/18 |
| Prepared By | JC  |      |        |

**PRODUCT SPECIFICATION**

|                      |                       |
|----------------------|-----------------------|
| <b>Category</b>      | Linear High Bay       |
| <b>Item Number</b>   | 7412                  |
| <b>Stock Code</b>    | LED-FXHBL210/44FR/840 |
| <b>Mounting</b>      | Chain / Yoke Mount    |
| <b>Housing Color</b> | White                 |



| ELECTRICAL CHARACTERISTICS |          |                         |          |
|----------------------------|----------|-------------------------|----------|
| Rated Wattage (W)          | 210      | Replacement Wattage (W) | 575-1000 |
| Tested Wattage (W)         | 210      |                         |          |
| Input Voltage (V)          | 120-277V | Surge Protect Level     | -        |
| Voltage Frequency (Hz)     | 50/60    |                         |          |
| Input Current (A)          | 2.2      | Dimmable                | 1-10V    |
| Power Factor               | >0.9     | AUX (12V) Line          | -        |
| THD                        | <20%     |                         |          |


| PHOTOMETRIC CHARACTERISTICS |        |                |       |
|-----------------------------|--------|----------------|-------|
| Lumen (lm)                  | 26,979 | CCT (K)        | 4000K |
| Efficacy (lm/w)             | 128    | Beam Angle (°) | 110°  |
| CRI                         | >80    |                |       |

| GENERAL CHARACTERISTICS    |               |
|----------------------------|---------------|
| Operating Temperature (°F) | -40°F ~ 122°  |
| Storage Temperature (°F)   | -40°F ~ 122°  |
| IP Rating                  | Damp Location |
| IK Rating                  | -             |
| Rated Life (Hrs)           | 50,000        |
| Warranty (Yrs)             | 5             |

| ACCESSORIES |                  |                      |
|-------------|------------------|----------------------|
| Item #      | Stock Code       | Description          |
| 7334        | BAEM15-48BC/MV-A | 15W Emergency Driver |
|             |                  |                      |
|             |                  |                      |
|             |                  |                      |

**PRODUCT DIMENSIONS**

|                      |            |
|----------------------|------------|
| Width- in / (mm)     | 44" / 1118 |
| Height- in / (mm)    | 16" / 405  |
| Depth- in / (mm)     | 2.19" / 56 |
| IK Rating            | -          |
| Weight (lbs)         | 16.53      |
| Mounting Height (ft) | -          |
| Cable Length (ft)    | -          |

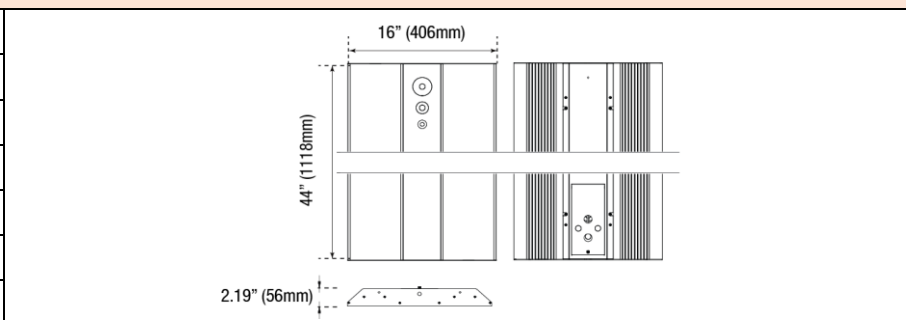

| CERTIFICATIONS     |          |      |   |
|--------------------|----------|------|---|
| UL/ETL             | ETL/cETL | CEC  |   |
| NSF/ETL Sanitation |          | JA8  |   |
| Energy Star        |          | FCC  | ✓ |
| DLC                |          | RoHs | ✓ |

| DOCUMENTS |   |             |   |
|-----------|---|-------------|---|
| LM79      | ✓ | IES File    | ✓ |
| LM80      | ✓ | Dimmer List |   |
|           |   |             |   |
|           |   |             |   |

**COMMENTS**

|  |
|--|
|  |
|--|