


Version	2.0	Date	6/19/23
Prepared By	JC		

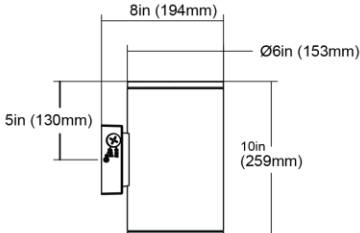
PRODUCT SPECIFICATION		PICTURE
Category	Wall Sconce Up/Down	
Item Number	7645	
Stock Code	FX6DWS36SW/20/8CCT3/BK/347-PH	
Mounting	Wall	
Housing Color	Black	

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	18/36W	Replacement Wattage (W)	200-400
Tested Wattage (W)	-		
Input Voltage (V)	120-347	Surge Protect Level	4KV
Voltage Frequency (Hz)	50/60	Dimmable	0-10V
Input Current (A)	0.33	AUX (12V) Line	-
Power Factor	>0.9	Photocell	Included
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	4,680	CCT (K)	3CCT (30/40/50K)
Efficacy (lm/w)	-	Beam Angle (°)	20°
CRI	>80	Position	Up/Down Up & Down

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-40°F ~ 122°
Storage Temperature (°F)	-22°F ~ 140°
IP Rating	IP65
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description

PRODUCT DIMENSIONS		
Width- in / (mm)	6" / 153	
Height- in / (mm)	10" / 259	
Depth- in / (mm)	8" / 194	
EPA (ft²)	-	
Weight (lbs)	5.29	
Mounting Height (ft)	-	
Cable Length (ft)	-	

CERTIFICATIONS			
UL/ETL	ETL,cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star	✓	FCC	✓
DLC		RoHs	

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS