

Version	1/2/1900	Date	4/15/2022
Prepared By	J.C		

**PRODUCT SPECIFICATION**

Category	Commercial wrap
Item Number	FXCWS44SW/48FR/8CCT3
Stock Code	9585
Mounting	Surface mount /Hanging mount
Housing Color	White



**ELECTRICAL CHARACTERISTICS**

Rated Wattage (W)	44/34/28/22	Replacement Wattage (W)	32W 3xT8
Tested Wattage (W)	44/34/28/22		
Input Voltage (V)	120-277V	Surge Protect Level	2KV
Voltage Frequency (Hz)	50/60HZ		
Input Current (A)	0.4A(max)	Dimmable	0-10V
Power Factor	≥0.9	AUX (12V) Line	YES
THD	<20%		

**PHOTOMETRIC CHARACTERISTICS**

Lumen (lm)	5720/4420/3640/2860	CCT (K)	3500K 4000K 5000K
Efficacy (lm/w)	130lm/w	Beam Angle (°)	110°
CRI	>80		

**GENERAL CHARACTERISTICS**


Operating Temperature (°F)	-13F ~ 104F
Storage Temperature (°F)	-13F ~ 176F
IP Rating	Damp
Rated Life	50000hrs
Warranty	5 years

**ACCESSORIES**

Item #	Stock Code	Description
P10438	SEN-HB001VCR-1	12V Motion sensor 0-10V dimming
7336	BAEM4-60BC/MV-A	4W Emergency Driver 120-277V
P10389	SPD-L-10KV-277	Long Type 10KV surge protector 120-277V
P10390	SPD-L-20KV-277	Long Type 20KV surge protector 120-277V

**PRODUCT DIMENSIONS**

Length- in (mm)	47.08	1196
Width- in (mm)	9.36	238
Height- in (mm)	2.72	69
EPA (ft²)		
Weight (lbs)	11.02	
Mounting Height (ft)	10ft-25ft	
Cable Length (ft)	-	

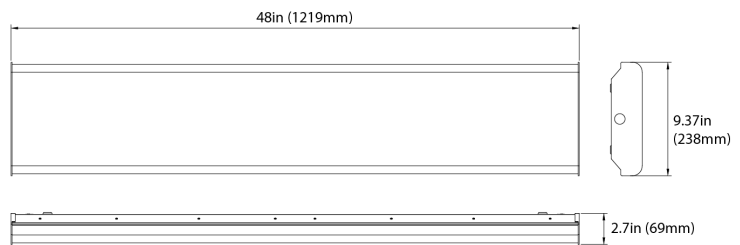

**CERTIFICATIONS**

UL/ETL	UL, cUL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	V5.1 Standard	RoHs	

**DOCUMENTS**

LM79	YES	IES File	YES
LM80	YES	Dimmer List	

**COMMENTS**

--