

CCM/PG CEILING CANOPY/PARKING GARAGE

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® CCM and PG series brings you our square and round shape surface mount with polycarbonate lens with excellent thermal design. Die cast aluminum housing, uniform and consistent color. IP65 Rated canopies for walkways, entrance eaves, stairwells, parking, area lighting.



APPLICATIONS

Warehouses, Parking Garages, Area Lighting, Security Lighting, Pathway Lighting, Entryway Lighting

Rated Life 50,000 Hours
Warranty 5 Years

FEATURES

- IP65 Rated
- UL Rated
- ColorTemp: 4000K, 5000K
- Voltage: 120-277V
- Powerfactor >0.9
- Surge Protection: 2KV
- Beam Angle: 140° for CCM
- Long Life LED Chips
- CRI: >70
- Operating temperature: - 22°F - 131°F
- Recommended 15-30 ft Height Performance
- Shatter-resistant Polycarbonate Lens
- Colors: Black /White
- 5 Year Warranty
- Optional for purchase: Emergency Driver

ACCESSORIES



SAMPLE NUMBER		LED-FXCCM40/40K/DB			
STYLE	FAMILY	SERIES	WATTAGE	CRI/COLOR TEMP	COLOR
LED	FX	CCM	40	40K	DB
LED Lighting	Fixture	(CCM) Ceiling Canopy (PG) Parking Garage	40 Watt	4000K	Dark Bronze (WH) White



CEILING CANOPY/PARKING GARAGE

CEILING & AREA LUMINAIRES

ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Color	Equiv Wattage	IP65 Rated
40	7538	LED-FXCCM40/40K/WH	4000K	3,429	White	175	•
40	7539	LED-FXCCM40/50K/WH	5000K	3,429	White	175	•
40	7167	LED-FXCCM40/50K/DB	5000K	3,429	Dark Bronze	175	•
60	7084	LED-FXCCM60/40K/DB	4000K	5,258	Dark Bronze	250	•
60	7085	LED-FXCCM60/50K/DB	5000K	4,948	Dark Bronze	250	•
60	7090	LED-FXPG60/40K/DB	4000K	6,964	Dark Bronze	250	•
60	7091	LED-FXPG60/50K/DB	5000K	7,318	Dark Bronze	250	•

ACCESSORIES (Ordered Separately)

Emergency Driver



7336 BAEM4-60BC/MV-A
(4W Emergency Driver for 40W)





7334 BAEM15-48BC/MV-A
(15W Emergency Driver for 60W)

DIMENSIONS

40W
4.70-lbs

60W
7.72-lbs

60W
13.00-lbs

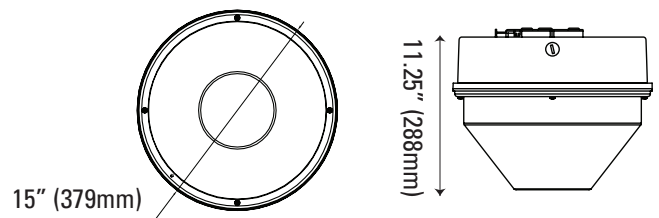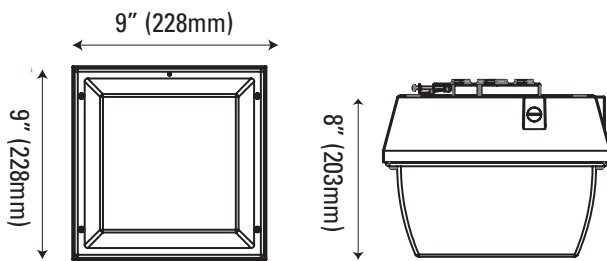

PACKAGE

Case Qty 1 pc

