

## SCM SLIM CANOPY 10"x10"

PROJECT: \_\_\_\_\_

SCHEDULE: \_\_\_\_\_ DATE: \_\_\_\_\_

PREPARE BY: \_\_\_\_\_

NOTES: \_\_\_\_\_

### DESCRIPTION

naturaLED® SCM IP65 rated fixtures come in an aesthetically pleasing construction, low-profile design with die-cast aluminum housing and shatter-resistant polycarbonate prismatic lens. In addition, they are dust-proof and include 1/2" threaded conduit entrances on each side. The SCM fixtures are available with or without a microwave occupancy sensor mounted behind the lens. This sensor has multiple settings that can be selected via a dip switch. The settings on the sensor include: step dimming, area sensitivity, standby time and on/off. The SCM supports both pendant mounting and direct surface mounting ceiling or wall. Pendant mounting accepts a 3/4" NPT thread and can be mounted to multiple types of J-boxes.



**Rated Life 50,000 Hours**  
**Warranty 5 Years**

### APPLICATIONS

Warehouses, Parking Garages, Offices, Factories, Hospitals, Hotels

### FEATURES

- DLC Premium Qualified
- IP65 Rated
- ETL Listed
- ColorTemp: 4000K, 5000K
- Voltage: 120-277V
- Powerfactor >0.9
- Surge Protection: 4KV
- Beam Angle: 160°
- Dimmable: 1-10V
- CRI: >80
- Operating temperature: - 40°F - 122°F
- Long life LED chips
- Material: Aluminum Die-Cast
- Colors: Black /White
- 5 Year Warranty
- Optional for purchase: Emergency Driver, Drop/Frosted Lens, Photocell, Motion Sensor, Surge Protector, Beauty Plates

### ACCESSORIES

	Emergency Driver
	Motion Sensor
	Beauty Plate
	Drop Lens
	Frosted Lens
	Surge Protector
	Photocell

SAMPLE NUMBER		FX10SCM28/840/BK-SEN				
FAMILY	SIZE	SERIES	WATTAGE	CRI/COLOR TEMP	COLOR	ACCESSORY
FX	10	SCM	28	840	BK	SEN
Fixture	10-inch	Slim Canopy	28 Watt	CRI 80 4000K	Black (WH) White	Motion Sensor none N/A



# SLIM CANOPY 10X10

CEILING & AREA LUMINAIRES

## ORDERING

\*P= Premium DLC / \*S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Dim (V)	Color	Sensor	IP65 Rated	DLC (S/P)
28	<b>9432</b>	FX10SCM28/840/BK-SEN	4000K	3,640	150	1-10V	Black	•	•	P
28	<b>9433</b>	FX10SCM28/850/BK-SEN	5000K	3,640	150	1-10V	Black	•	•	P
42	<b>9434</b>	FX10SCM42/840/BK-SEN	4000K	5,517	175	1-10V	Black	•	•	P
59	<b>9436</b>	FX10SCM59/840/BK-SEN	4000K	7,695	250	1-10V	Black	•	•	P
28	<b>9414</b>	FX10SCM28/840/BK	4000K	3,640	150	1-10V	Black	-	•	P
28	<b>9415</b>	FX10SCM28/850/BK	5000K	3,640	150	1-10V	Black	-	•	P
42	<b>9418</b>	FX10SCM42/840/BK	4000K	5,517	175	1-10V	Black	-	•	P
59	<b>9422</b>	FX10SCM59/840/BK	4000K	7,695	250	1-10V	Black	-	•	P
59	<b>9423</b>	FX10SCM59/850/BK	5000K	7,845	250	1-10V	Black	-	•	P
28	<b>9416</b>	FX10SCM28/840/WH	4000K	3,640	150	1-10V	White	-	•	P
28	<b>9417</b>	FX10SCM28/850/WH	5000K	3,640	150	1-10V	White	-	•	P
42	<b>9420</b>	FX10SCM42/840/WH	4000K	5,517	175	1-10V	White	-	•	P
42	<b>9421</b>	FX10SCM42/850/WH	5000K	5,638	175	1-10V	White	-	•	P
59	<b>9424</b>	FX10SCM59/840/WH	4000K	7,695	250	1-10V	White	-	•	P

## ACCESSORIES (Ordered Separately)

### Motion Sensor



P10234 SEN-MC605V-D  
(Microwave Motion Sensor 0-10V)

### Emergency Driver



7336 BAEM4-60BC/MV-A  
(Emergency Driver for 28W, 42W, 59W  
For 59W usage up to 10-12ft in height  
\*not available for #9432, 9433, 9434, 9436)

### Photocell



P10036 SEN-PHO-BT-MT/MV  
(Button Photocell 120V-277)

### Beauty Plates



P10195 PLT-SCM/14X14/WH  
(14"x14" Beauty Plate used with SCM)

P10196 PLT-SCM/24X24/WH  
(24"x24" Beauty Plate used with SCM)

### Frosted Lens



P10125 LENS-SCM/FR9X9  
(Frosted Lens for SCM 28W, 42W, 59W)

### Drop Lens



P10126 LENS-SCM/DR9X9  
(Drop Lens for SCM 28W, 42W, 59W)

### Surge Protector



P10389 SPD-L-10KV-277  
(Surge Protection 10KV 120-277V)




P10390 SPD-L-20KV-277  
(Surge Protection 20KV 120-277V)



P10391 SPD-L-20KV-480  
(Surge Protection 20KV 347-480V)


**DIMENSIONS**

**28W**      **42W**      **59W**  
4.50-lbs    5.10-lbs    5.10-lbs

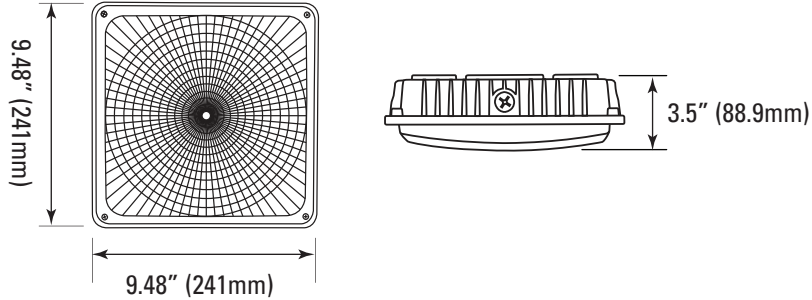

**PHOTOMETRICS CHART**


**28 Watt**  
DLC Premium



Center Beam fc	Beam Width	
2.6R	101 fc	16.6 ft
5.0R	25.3 fc	33.1 ft
7.6R	11.3 fc	49.7 ft
10.0R	6.34 fc	66.3 ft
12.6R	4.06 fc	82.8 ft
15.0R	2.82 fc	99.4 ft

Vert. Spread: 146.4°  
Horiz. Spread: 142.7°


**42 Watt**  
DLC Premium



Center Beam fc	Beam Width	
2.6R	140 fc	25.6 ft
5.0R	34.9 fc	51.2 ft
7.6R	15.5 fc	76.9 ft
10.0R	8.72 fc	102.5 ft
12.6R	5.58 fc	128.1 ft
15.0R	3.88 fc	153.7 ft

Vert. Spread: 157.9°  
Horiz. Spread: 151.6°


**59 Watt**  
DLC Premium



Center Beam fc	Beam Width	
2.6R	219 fc	20.9 ft
5.0R	54.6 fc	41.8 ft
7.6R	24.3 fc	62.7 ft
10.0R	13.1 fc	83.5 ft
12.6R	8.74 fc	104.4 ft
15.0R	6.07 fc	125.3 ft

Vert. Spread: 153.1°  
Horiz. Spread: 156.9°


**28 Watt with sensor**  
DLC Premium



Center Beam fc	Beam Width	
2.6R	101 fc	16.4 ft
5.0R	25.3 fc	33.7 ft
7.6R	11.3 fc	49.7 ft
10.0R	6.34 fc	66.3 ft
12.6R	4.06 fc	82.8 ft
15.0R	2.82 fc	99.4 ft

Vert. Spread: 146.4°  
Horiz. Spread: 142.7°


**42 Watt with sensor**  
DLC Premium



Center Beam fc	Beam Width	
2.6R	140 fc	25.2 ft
5.0R	34.9 fc	51.2 ft
7.6R	15.5 fc	76.9 ft
10.0R	8.72 fc	102.5 ft
12.6R	5.58 fc	128.1 ft
15.0R	3.88 fc	153.7 ft

Vert. Spread: 157.9°  
Horiz. Spread: 151.6°

**59 Watt with sensor**  
DLC Premium



Center Beam fc	Beam Width	
2.6R	219 fc	20.9 ft
5.0R	54.6 fc	41.8 ft
7.6R	24.3 fc	62.7 ft
10.0R	13.7 fc	83.5 ft
12.6R	8.74 fc	104.4 ft
15.0R	6.07 fc	125.3 ft

Vert. Spread: 153.1°  
Horiz. Spread: 156.9°

**PACKAGE**

Case Qty 1 pc

