

SWP SLIM WALL PACK

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® slim, low-profile cutoff wall pack with the smooth contemporary design. Well-engineered, high-quality die-cast aluminum, delivering bright, crisp light. The excellent thermal design ensures our SWP's performance over rated life. Installation is made simple and easy with an adjustable angle and hinged junction box. SWP is ideal for landscape, wall/surface, low-level pathway, apartment buildings, schools and multi-use facilities.



**Rated Life 50,000 Hours
Warranty 5 Years**

APPLICATIONS

Security, Pathway, Perimeter, Entryway, Area Lighting, and building facades

FEATURES

- IP65 Rated
- UL Listed
- ADA Compliance (4" Depth)
- ColorTemp: 4000K, 5000K
- Voltage: 120-277V
- Surge Protection: 2KV
- Beam Angle: 110°
- CRI: >70
- Operating temperature: -22°F - 122°F
- Excellent thermal design
- Material: Die Cast Aluminum
- Finish: Corrosion resistant powder coating
- Color: Bronze / Black
- 5 Year Warranty
- Optional for Purchase: Photocell Sensor

ACCESSORIES



SAMPLE NUMBER LED-FXSWP15/40K/BK

STYLE	FAMILY	SERIES	WATTAGE	COLOR TEMP	FINISH COLOR
LED LED Lighting	FX Fixture	SWP Slim Wall Pack	15 15 Watt	40K 4000K	BK Black (DB) Bronze



ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Color	Depth* (ADA)	IP65 Rated
15	7462	LED-FXSWP15/40K/BK	4000K	1,740	75	Black	4"	•
15	7463	LED-FXSWP15/50K/BK	5000K	1,797	75	Black	4"	•
29	7453	LED-FXSWP29/50K/BK	5000K	3,329	175	Black	4"	•
50	7549	LED-FXSWP50/50K/BK	5000K	5,856	250	Black	4"	•
29	7574	LED-FXSWP29/40K/DB	4000K	3,329	175	Bronze	4"	•
50	7577	LED-FXSWP50/50K/DB	5000K	5,856	250	Bronze	4"	•

*Accessible for Americans with Disability Act

ACCESSORIES (Ordered Separately)


Photocell Sensor



P10036 SEN-PHO-BT-MT/MV
(Button Photocell 120-277V)

DIMENSIONS

15W / 29W / 50W
3.90-lbs

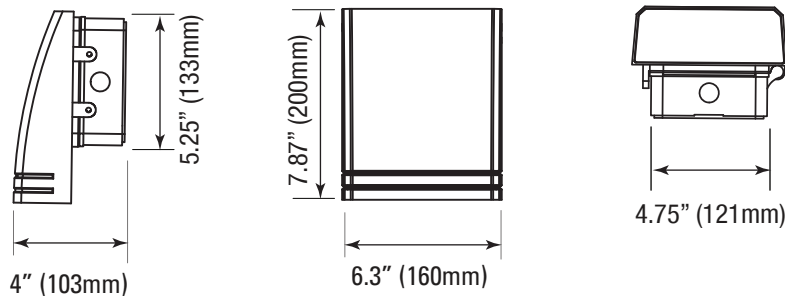

PHOTOMETRICS CHART

PACKAGE

15 Watt

29 Watt

50 Watt

Case Qty 5 pcs

