

## TWP TRADITIONAL WALL PACK CCT 3

PROJECT: \_\_\_\_\_

SCHEDULE: \_\_\_\_\_ DATE: \_\_\_\_\_

PREPARE BY: \_\_\_\_\_

NOTES: \_\_\_\_\_

### DESCRIPTION

naturaLED® TWP traditional wallpack comes in rugged cast-aluminum housing with excellent thermal design. DLC Premium qualified, our TWP product offers a popular classic appearance for your needs. The traditional shape maintains an aesthetic appearance and will replace any building's wallpack or perimeter lighting. Ideal for outdoor applications such as carports, loading areas, driveways, parking area and pathways. Designed for wall mounting above four feet from ground. New available in Wattage Selectable and Color Temperature Selectable option. \*Requires an easy installation using the connectors to activate photocell sensor.



**Rated Life 50,000 Hours  
Warranty 5 Years**

### APPLICATIONS

Security, Pathway, Perimeter, Entryway, Area Lighting, and building facades

### FEATURES

- DLC Premium Qualified
- IP65 Rated
- ETL Listed
- Selectable Wattages
- Color Temp: 4000K, 5000K / 3CCT (3000/4000/5000K)
- Voltage: 120-277V, 120-347V
- Input Current: 28W-0.24A, 38W-0.32A, 60W-0.50A, 80W-0.67A, 100W-0.50A
- Power Factor >0.9
- Surge Protection: 4KV
- Beam Angle: Forward Throw
- Dimmable: 0-10V
- CRI: 80
- Operating temperature: - 40°F - 122°F
- Built In Photocell Sensor Included (Easy connector to activate the photocell)
- Material: Die Cast Aluminum
- Lens: Borosilicate Glass Lens
- Finish: Corrosion resistant powder coating
- Colors: Bronze, White
- 5 Year Warranty
- Optional for Purchase: Motion Sensor, Emergency Driver, Wireguard, Replacement Lens, Shield Cover, Surge Protection

### ACCESSORIES

|  |                   |
|--|-------------------|
|  | Motion Sensor     |
|  | Emergency Drivers |
|  | Wireguard         |
|  | Replacement Lens  |
|  | Shield Cover      |
|  | Surge Protection  |

### SAMPLE NUMBER FXTWP60SW/CCT3/BZ-PHO

| FAMILY        | SERIES                          | WATTAGE         | SELECTABLE                  | COLOR TEMP                      | FINISH COLOR | ACCESSORY                    |
|---------------|---------------------------------|-----------------|-----------------------------|---------------------------------|--------------|------------------------------|
| FX<br>Fixture | TWP<br>Traditional<br>Wall Pack | 60<br>28/38/60W | SW<br>Selectable<br>Wattage | CCT3<br>3000K<br>4000K<br>5000K | BZ<br>Bronze | PHO<br>Photocell<br>Included |



# TRADITIONAL WALL PACK & CCT 3

## WALL & AREA LUMINAIRES

### ORDERING

\*P= Premium DLC / \*S = Standard DLC

| Watts (W) | Ordering Code | Description                | CCT (K)     | Lumens (Lm) | Equiv. Wattage (W) | Color  | IP65 Rated | DLC (S/P) |
|-----------|---------------|----------------------------|-------------|-------------|--------------------|--------|------------|-----------|
| 28        | <b>9453</b>   | FXTWP28/40K/BZ-PHO         | 4000K       | 4,200       | 175                | Bronze | •          | P         |
| 28        | <b>9454</b>   | FXTWP28/50K/BZ-PHO         | 5000K       | 4,200       | 175                | Bronze | •          | P         |
| 38        | <b>9447</b>   | FXTWP38/40K/BZ-PHO         | 4000K       | 5,700       | 175-250            | Bronze | •          | P         |
| 38        | <b>9448</b>   | FXTWP38/50K/BZ-PHO         | 5000K       | 5,700       | 175-250            | Bronze | •          | P         |
| 60        | <b>9449</b>   | FXTWP60/40K/BZ-PHO         | 4000K       | 9,000       | 250-400            | Bronze | •          | P         |
| 60        | <b>9450</b>   | FXTWP60/50K/BZ-PHO         | 5000K       | 9,000       | 250-400            | Bronze | •          | P         |
| 80        | <b>9451</b>   | FXTWP80/40K/BZ-PHO         | 4000K       | 12,000      | 400- 575           | Bronze | •          | P         |
| 80        | <b>9452</b>   | FXTWP80/50K/BZ-PHO         | 5000K       | 12,000      | 400-575            | Bronze | •          | P         |
| 80        | <b>9542</b>   | FXTWP80/50K/WH-PHO         | 5000K       | 12,000      | 400-575            | White  | •          | P         |
| 28        | <b>9455</b>   | FXTWP60SW/CCT3/BZ-PHO      | 3CCT        | 4,200       | 175-400            | Bronze | •          | P         |
| 38        |               |                            | (30/40/50K) | 5,700       |                    |        | •          | P         |
| 60        |               |                            |             | 9,134       |                    |        | •          | P         |
| 60        | <b>9456</b>   | FXTWP100SW/CCT3/BZ-PHO     | 3CCT        | 9,000       | 400-750            | Bronze | •          | P         |
| 80        |               |                            | (30/40/50K) | 11,600      |                    |        | •          | P         |
| 100       |               |                            |             | 14,500      |                    |        | •          | P         |
| 38        | <b>9534</b>   | FXTWP38/40K/BZ/347-PHO     | 4000K       | 5,700       | 175-250            | Bronze | •          | P         |
| 38        | <b>9535</b>   | FXTWP38/50K/BZ/347-PHO     | 5000K       | 5,700       | 175-250            | Bronze | •          | P         |
| 60        | <b>9536</b>   | FXTWP60/40K/BZ/347-PHO     | 4000K       | 9,000       | 250-400            | Bronze | •          | P         |
| 60        | <b>9537</b>   | FXTWP60/50K/BZ/347-PHO     | 5000K       | 9,000       | 250-400            | Bronze | •          | P         |
| 28        | <b>9532</b>   | FXTWP60SW/CCT3/BZ/347-PHO  | 3CCT        | 4,200       | 250-400            | Bronze | •          | P         |
| 38        |               |                            | (30/40/50K) | 5,700       |                    |        | •          | P         |
| 60        |               |                            |             | 9,000       |                    |        | •          | P         |
| 60        | <b>9533</b>   | FXTWP100SW/CCT3/BZ/347-PHO | 3CCT        | 8,700       | 400-750            | Bronze | •          | P         |
| 80        |               |                            | (30/40/50K) | 11,600      |                    |        | •          | P         |
| 100       |               |                            |             | 14,500      |                    |        | •          | P         |

## ACCESSORIES (Ordered Separately)

---

### Motion Sensor



P10234 SEN-MC605V-D  
(Microwave Motion Photocell Sensor 0-10V)

### Shield



P10402 CVR-TWP-SMALL/BZ  
(Shield cover- small 28W Bronze, Size: 9.05"x9.20")



P10403 CVR-TWP-MEDIUM/BZ  
(Shield cover- medium 38-100W Bronze, Size: 14.30"x9.20")

### Wireguard



P10004 WG-TWP-MEDIUM  
(Wireguard for Medium TWP  
38W,60W,80W,100W,CCT3, Size: 14.30"x9.20")

### Surge Protection



P10389 SPD-L-10KV-277  
(Surge Protection 10KV 120-277V)



P10390 SPD-L-20KV-277  
(Surge Protection 20KV 120-277V)



P10391 SPD-L-20KV-480  
(Surge Protection 20KV 347-480V)

### Emergency Driver



7336 BAEM4-60BC/MV-A  
(4W CEC Compliant LED Emergency Driver for 28W, 38W)



7334 BAEM15-48BC/MV-A  
(15W CEC Compliant LED Emergency Driver  
for 60W, 80W, 60W CCT3)

### Replacement Glass Lens



P10002 LENS-TWP-SMALL  
(Glass Lens Gasket for 28W, Size: 9.05"x9.20")



P10000 LENS-TWP-MEDIUM  
(Glass Lens Gasket for 38-100W, CCT3, Size: 14.30"x9.20")

### Replacement Plastic Lens




P10003 LENS-TWP-PC-MEDIUM  
(Plastic Lens Gasket for 38-100W, CCT3, Size: 14.30"x9.20")

# TRADITIONAL WALL PACK & CCT 3


WALL & AREA LUMINAIRES

## DIMENSIONS

**28W**  
5.51-lbs

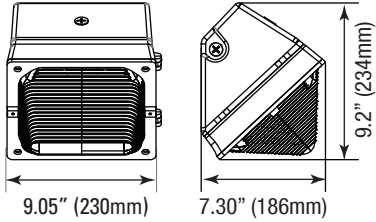


**38W**  
6.79-lbs




**60W**  
6.86-lbs


**CCT3 60W**  
6.86-lbs



**80W**  
8.07-lbs




**CCT3 100W**  
9.26-lbs



## PHOTOMETRICS CHART


**28 Watt**  
DLC Premium



| Center Beam fc | Beam Width    |
|----------------|---------------|
| 2.5R: 136 fc   | 7.8 R 11.7 R  |
| 5.0R: 34.0 fc  | 15.6 R 23.4 R |
| 7.5R: 15.1 fc  | 23.5 R 35.1 R |
| 10.0R: 8.50 fc | 31.3 R 46.8 R |
| 12.5R: 5.44 fc | 39.1 R 58.5 R |
| 15.0R: 3.78 fc | 45.9 R 70.3 R |

Vert. Spread: 114.8°  
Horiz. Spread: 133.8°


**38 Watt**  
DLC Premium



| Center Beam fc | Beam Width    |
|----------------|---------------|
| 2.5R: 182 fc   | 6.5 R 7.2 R   |
| 5.0R: 45.4 fc  | 12.9 R 14.4 R |
| 7.5R: 20.2 fc  | 19.4 R 21.5 R |
| 10.0R: 11.3 fc | 25.9 R 28.7 R |
| 12.5R: 7.25 fc | 32.4 R 35.9 R |
| 15.0R: 5.04 fc | 38.8 R 43.1 R |

Vert. Spread: 104.6°  
Horiz. Spread: 110.3°


**60 Watt**  
DLC Premium



| Center Beam fc | Beam Width    |
|----------------|---------------|
| 2.5R: 284 fc   | 6.3 R 5.9 R   |
| 5.0R: 71.1 fc  | 12.7 R 11.8 R |
| 7.5R: 31.6 fc  | 19.0 R 17.6 R |
| 10.0R: 17.8 fc | 25.3 R 23.5 R |
| 12.5R: 11.4 fc | 31.7 R 29.4 R |
| 15.0R: 7.90 fc | 38.0 R 35.3 R |

Vert. Spread: 103.4°  
Horiz. Spread: 99.3°


**80 Watt**  
DLC Premium



| Center Beam fc | Beam Width    |
|----------------|---------------|
| 2.5R: 435 fc   | 6.8 R 5.8 R   |
| 5.0R: 109 fc   | 13.6 R 11.6 R |
| 7.5R: 48.5 fc  | 20.5 R 17.4 R |
| 10.0R: 27.3 fc | 27.3 R 23.2 R |
| 12.5R: 17.5 fc | 34.1 R 29.0 R |
| 15.0R: 12.1 fc | 40.9 R 34.8 R |

Vert. Spread: 107.5°  
Horiz. Spread: 98.5°


**28/38/60 Watt (CCT)**  
DLC Premium



| Center Beam fc | Beam Width    |
|----------------|---------------|
| 2.5R: 254 fc   | 6.8 R 7.0 R   |
| 5.0R: 63.4 fc  | 13.6 R 13.9 R |
| 7.5R: 28.2 fc  | 20.4 R 20.9 R |
| 10.0R: 15.8 fc | 27.2 R 27.9 R |
| 12.5R: 10.1 fc | 34.0 R 34.8 R |
| 15.0R: 7.04 fc | 40.7 R 41.8 R |

Vert. Spread: 107.3°  
Horiz. Spread: 100.7°

**60/80/100 Watt (CCT)**  
DLC Premium



| Center Beam fc | Beam Width    |
|----------------|---------------|
| 2.5R: 548 fc   | 6.9 R 6.5 R   |
| 5.0R: 137 fc   | 13.9 R 13.0 R |
| 7.5R: 60.9 fc  | 20.8 R 19.5 R |
| 10.0R: 34.3 fc | 27.8 R 26.0 R |
| 12.5R: 21.9 fc | 34.7 R 32.5 R |
| 15.0R: 15.2 fc | 41.7 R 39.0 R |

Vert. Spread: 108.5°  
Horiz. Spread: 104.9°

## PACKAGE

Case Qty 1 pc

