

## TWP TRADITIONAL WALL PACK

### DESCRIPTION

naturaLED® TWP traditional wallpack comes in rugged cast-aluminum housing with excellent thermal design. Our TWP product offers a popular classic appearance for your needs. The traditional shape maintains an aesthetic appearance and will replace any building's wallpack or perimeter lighting. Ideal for outdoor applications such as carports, loading areas, driveways, parking area and pathways. Designed for wall mounting above four feet from ground.

### APPLICATIONS

Security, Pathway, Perimeter, Entryway, Area Lighting, and building facades

### FEATURES

- IP65 Rated
- ETL Listed
- ColorTemp: 3000K, 4000K, 5000K
- Voltage: 120-277V
- Power Factor: >0.9
- Surge Protection: 2KV
- Beam: Forward Throw
- Dimmable: 0-10V / 1-10V
- CRI: 70
- Operating temperature: -22°F - 131°F
- Excellent thermal design
- Material: Die Cast Aluminum
- Lens: Borosilicate Glass Lens
- Finish: Corrosion resistant powder coating
- Color: Dark Bronze
- 5Year Warranty
- Optional for Purchase: Photocell Sensor, Microwave Sensor, LED Emergency Drivers Compatible

PROJECT: \_\_\_\_\_

SCHEDULE: \_\_\_\_\_ DATE: \_\_\_\_\_

PREPARE BY: \_\_\_\_\_

NOTES: \_\_\_\_\_



**Rated Life Hours 50,000**  
**Warranty 5 Years**

### ACCESSORIES

- Motion Sensor
- Emergency Drivers
- Wireguard
- Replacement Lens
- Cut off Shield
- Photocell Sensor

**SAMPLE NUMBER** LED-FXTWP28/30K/DB

STYLE	FAMILY	SERIES	WATTAGE	COLOR TEMP	FINISH COLOR
LED	FX	TWP	28	30K	DB
LED Lighting	Fixture	Traditional Wall Pack	28 Watt	3000K	Dark Bronze



### ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Size	Equiv. Wattage (W)	Dim (V)	IP65 Rated
28	<b>7756</b>	LED-FXTWP28/30K/DB	3000K	3,448	8.66" x 7.25"	175	1-10V	•
58	<b>7777</b>	LED-FXTWP55/40K/DB	4000K	8,382	14.5" x 9"	400-575	0-10V	•
59	<b>7758</b>	LED-FXTWP59/30K/DB	3000K	7,128	18.5" x 9"	250-400	0-10V	•
60	<b>7088</b>	LED-FXTWP60/40K/DB	4000K	7,449	14.5" x 9"	250-400	1-10V	•

### ACCESSORIES (Ordered Separately)

#### Motion Sensor



P10234 SEN-MC605V-D  
(Microwave Motion Sensor 0-10V)

#### Wireguard



P10004 WG-TWP-MEDIUM  
(Wireguard for medium 39-60W)

#### Emergency Driver



7334 BAEM15-48BC/MV-A  
(15W Emergency Backup Driver 120-277V)



7336 BAEM4-60BC/MV-A  
(4W Emergency Backup Driver 120-277V for #7756-28W)

#### Photocell



P10036 SEN-PHO-BT-MT/MV  
(Button Photocell 120-277V)

#### Replacement Glass Lens



P10002 LENS-TWP-SMALL  
(Glass Lens Gasket for 28W)



P10000 LENS-TWP-MEDIUM  
(Glass Lens Gasket for 14.5" x 9")



P10001 LENS-TWP-LARGE  
(Glass Lens Gasket for Size: 18.5" x 9")

#### Replacement PC Lens



P10003 LENS-TWP-PC-MEDIUM  
(Plastic Lens Gasket for 14.5" x 9")

#### Shield




P10022 CVR-TWP-MEDIUM/DB  
(Full Cut-off Shield for medium. Size: 14.5" x 9")




P10023 CVR-TWP-LARGE/DB  
(Full Cut-off Shield for Size: 18.5" x 9")

**DIMENSIONS**


**28W**  
5.51-lbs

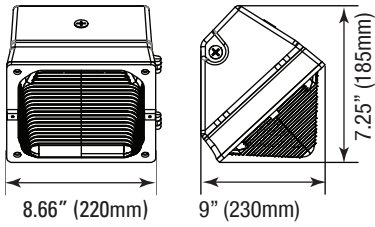

**58W / 60W**  
7.00-lbs

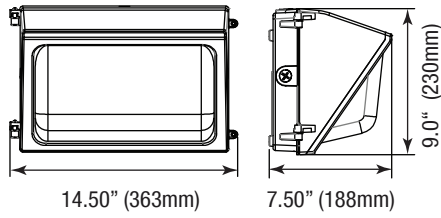


**59W**  
12-lbs

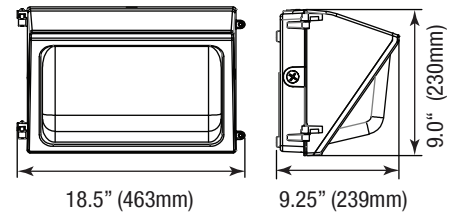

**PHOTOMETRICS CHART**


**28 Watt**

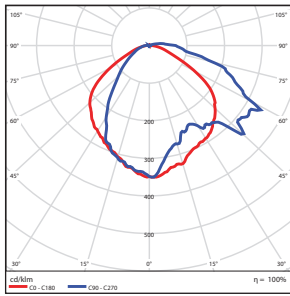

Center Beam fc	Beam Width
5.0ft	41.9 ft 14.6 ft 15.0 ft
10.0ft	10.5 ft 29.1 ft 30.0 ft
15.0ft	4.66 ft 43.7 ft 45.0 ft
20.0ft	2.62 ft 58.3 ft 59.9 ft
25.0ft	1.68 ft 72.9 ft 74.9 ft
30.0ft	1.17 ft 87.4 ft 89.9 ft

■ Vert. Spread: 111.1°  
■ Horiz. Spread: 112.6°

**58W / 60 Watt**

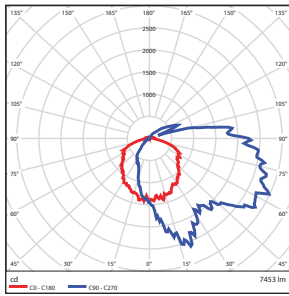

Center Beam fc	Beam Width
2.5ft	229 ft 3.1 ft
5.0ft	57.2 ft 6.2 ft
7.5ft	25.4 ft 9.3 ft
10.0ft	14.3 ft 12.3 ft
12.5ft	9.16 ft 15.4 ft
15.0ft	6.36 ft 18.5 ft

■ Horiz. Spread: 63.3°

**PACKAGE**

Case Qty 1 pc

