

USL Utility Strip Light

DESCRIPTION

naturaLED® Utility Strip Light provides the perfect solution for your lighting needs. The LED utility strip light maximizes energy savings and is designed for multiple applications including retrofit and new construction. The fixture is 48-inches long and can be installed end to end. The LED Utility Strip Light can be used for warehouse, parking garages, stairwells, offices, hallways and many other applications in industrial, commercial and residential. Types of installation include ceiling, wall, chain or cable mounting. Our Utility Strip Light is very versatile, efficient and is available in 40 watt, 4000K and 5000K delivering excellent, consistent color.

APPLICATIONS

Kitchen, decoration, hallway, bedroom, ceiling mount lighting

FEATURES

- DLC Standard
- Damp Location
- ETL Listed
- ColorTemp: 4000K, 5000K
- Voltage: 120-277V
- Power Factor: >0.9
- Surge Protection: 2KV
- Beam Angle: 110°
- Dimmable: 0-10V
- CRI: >80
- Operating temperature: -4°F - 131°F
- Mounting brackets/clips for ceiling, wall, cable, and chain
- 1/2" knockouts
- Motion/Daylight Sensor
- Recommended ceiling height at 8-10ft
- Material: Aluminum and Opaque Lens
- Optional for purchase: Emergency Driver, Motion Sensor, Wireguard, Step-down Driver


PROJECT:

SCHEDULE:

DATE:

PREPARE BY:


NOTES:

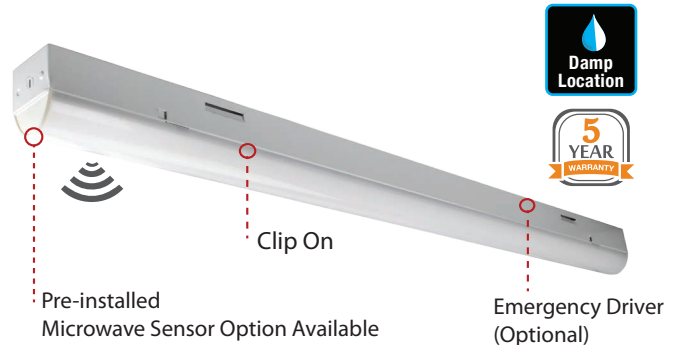

Rated Life 50,000 Hours
Warranty 5 Years

ACCESSORIES

- Emergency Drivers
- Motion Sensor
- Wireguard
- Step Down Driver

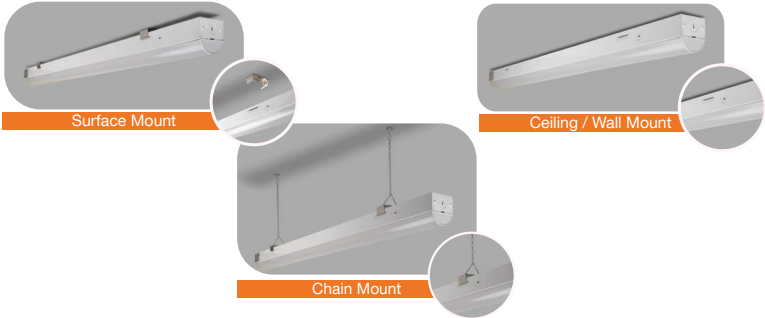

SAMPLE NUMBER LED-FXUSL40/48FR/840/MV-SEN

STYLE	FAMILY	SERIES	WATTAGE	LENGTH	CRI/COLOR TEMP	VOLTAGE
LED	FX	USL	40	48FR	840	MV-SEN
LED Lighting	Fixture	Utility Strip Light	40 Watt	48 inch Frosted Lens	CRI 80 4000K	Multiple Voltage Sensor



ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Size	Dim	Equiv. Wattage (W)	DLC (P/S)
38	7593	LED-FXUSL40/48FR/840/MV	4000K	5,241	2.5" x 48"	0-10V	2 x 32WT8	S
38	7594	LED-FXUSL40/48FR/850/MV	5000K	5,395	2.5" x 48"	0-10V	2 x 32WT8	S
38	9253	LED-FXUSL40/48FR/840/MV-SEN	4000K	5,241	2.5" x 48"	0-10V	2 x 32WT8	S

ACCESSORIES (Ordered Separately)

Emergency Driver



7336 BAEM4-60BC/MV-A
(4W CEC Compliant LED
Emergency Driver 120-277V)

Wireguard



P10303 WG-USL/48/WH
(Wireguard)

Motion Sensor



P10234 SEN-MC605V-D
(Motion Daylight Sensor)


Step Down Driver



P10138 BA-GETR480/277-250W
(347-480V to 277V Step Down Driver)


DIMENSIONS

4ft
3.85-lbs

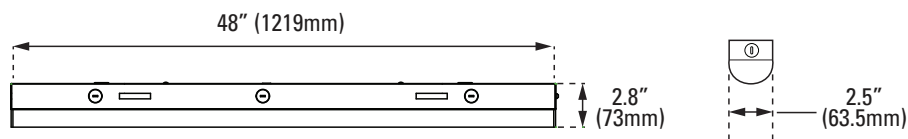

PHOTOMETRICS CHART

38 Watt - 4ft
DLC



Center Beam fc	Beam Width
191 fc	7.5 ft 11.8 ft
47.7 fc	15.1 ft 23.6 ft
21.2 fc	22.6 ft 35.4 ft
11.9 fc	30.1 ft 47.2 ft
7.63 fc	37.6 ft 59.1 ft
5.30 fc	45.2 ft 70.9 ft

■ Vert. Spread: 112.8°
■ Horiz. Spread: 134.1°

PACKAGE

Case Qty 1 pc

