


Version	2.0	Date	5/30/24
Prepared By	JC		

PRODUCT SPECIFICATION	
Category	Sports Court Lighting
Item Number	5203
Stock Code	FXSCL600SW/840/BK/TT
Mounting	Pole Mount/ Slip Fitter/ Yoke Mount
Housing Color	Black

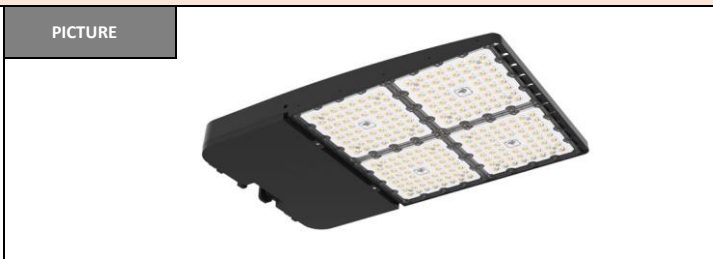

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	400/500/600	Replacement Wattage (W)	1000-1500W
Tested Wattage (W)			
Input Voltage (V)	120-277V	Surge Protect Level	20KV
Voltage Frequency (Hz)	50/60	Dimmable	0-10V
Input Current (A)	5 (@120V)	AUX (12V) Line	Yes
Power Factor	>0.9		
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	60,000 75,000 89,834	CCT (K)	4000K
Efficacy (lm/w)	150	Beam Angle (°)	Type TT
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-40°F ~ 122°
Storage Temperature (°F)	-40°F ~ 176°F
IP Rating	IP66
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
P10371	SEN-BRI619	Motion/Photocell 0-10V Bi-Level Internal 12-24V
P10316	SEN-BRI-RC100	Remote Programmer
K141030	REC3PLK/PHO	Twist-Lock Photocell & Receptacle 120-277V 3 Prong

PRODUCT DIMENSIONS		
Width- in / (mm)	16.01" / 408	
Height- in / (mm)	2.60" / 66	
Depth- in / (mm)	26.40" / 670	
EPA (ft²)	0.33ft² (@0°)	
Weight (lbs)	22	
Mounting Height (ft)	20~40	
Cable Length (ft)		

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Premium	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS