

Version	2.0	Date	5/27/22
Prepared By			

PRODUCT SPECIFICATION	
Category	Cut Off Wall Pack
Item Number	9444
Stock Code	LED-FXCWP80/50K/BZ
Mounting	Wall Mount
Housing Color	Bronze




ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	83	Replacement Wattage (W)	400-575
Tested Wattage (W)	83		
Input Voltage (V)	120-277V	Surge Protect Level	6KV
Voltage Frequency (Hz)	50/60	Dimmable	0-10V
Input Current (A)	0.69	AUX (12V) Line	Yes
Power Factor	>0.9	Photocell	Included

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	11,193	CCT (K)	5000K
Efficacy (lm/w)	135	Beam Angle (°)	Cut-Off
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	- 40°F ~ 122°F
Storage Temperature (°F)	- 40°F ~ 176°F
IP Rating	IP65
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
P10540	SEN-ANT-11-WH	Microwave Sensor 0-10V, need P10380
P10316	SEN-BRI-RC100	Remote Programmer for P10540

PRODUCT DIMENSIONS		
Width- in / (mm)	14.2	360
Height- in / (mm)	9.25	235
Depth- in / (mm)	6.5	166
EPA (ft²)	-	
Weight (lbs)	7.48	
Mounting Height (ft)	15~25	
Cable Length (ft)	-	

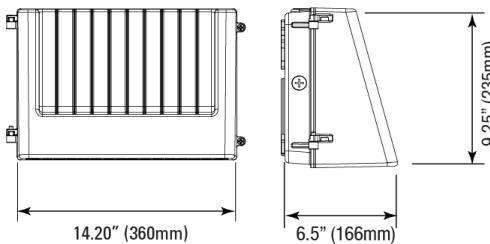

CERTIFICATIONS			
UL/ETL	UL/cUL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Premium	RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS