

## VTJ VAPOR TIGHT JELLY JAR

### DESCRIPTION

naturaLED® VaporTight Jelly Jar (VTJ) are designed to replace incandescent and CFL fixtures with long-lasting illumination over doorways, scaffolding, construction sites, and many more applications. Our naturaLED® LED VaporTight Jelly Jars are IP65 Rated against ingress of dust, pressurized water and harsh environments. Constructed with cast aluminum housing and glass lens. Available in two different mounting options: ceiling and wall, 65% less energy and zero maintenance cost for up to 50,000+ average life hours.

### APPLICATIONS

Warehouse , Security, Pathway, Doorway, Scaffolding, Fire Hydrants, Construction Sites Lighting

### FEATURES

- Energy Star Qualified
- IP65 Rated
- ETL Listed
- ColorTemp: 3000K, 4000K
- Voltage: 120-277V
- Surge Protection: 2KV
- CRI: 80
- Operating temperature: - 4°F - 122°F
- Frosted glass diffuser provides you glare-free light
- High efficacy with 90 lumen per watt
- High- temperature silicone gasket protects against moisture and dust
- Four 1/2" conduit entries for easy wiring
- Available in wall or ceiling mount
- Material: die cast aluminum / glass
- Color: Silver
- 5 Year Warranty

PROJECT:

SCHEDULE:

DATE:

PREPARE BY:

NOTES:




**Rated Life 50,000 Hours**  
**Warranty 5 Years**

### ACCESSORIES



### REPLACEMENT SAVINGS

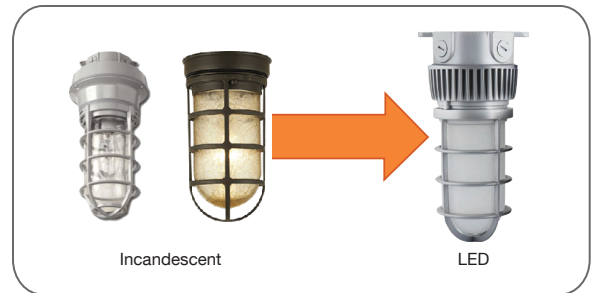

Replace Incandescent and CFL with LED

**SAMPLE NUMBER** LED-FXVTJ20/830/MV-WM

STYLE	FAMILY	SERIES	WATTAGE	CRI/COLOR TEMP	MV	WM
LED LED Lighting	FX Fixture	VTJ Vapor Tight Jelly Jar	20 20 Watt	830 CRI 80 3000K	MV Multiple Voltage	WM Wall Mounting (CM) Ceiling Mounting



# VAPOR TIGHT JELLY JAR


WALL & AREA LUMINAIRES

## ORDERING


Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Mount	IP65 Rated	Energy Star
20	<b>7604</b>	LED-FXVTJ20/830/MV-WM	3000K	1,713	150	Wall	•	•
20	<b>7605</b>	LED-FXVTJ20/840/MV-WM	4000K	1,713	150	Wall	•	•
20	<b>7606</b>	LED-FXVTJ20/830/MV-CM	3000K	1,713	150	Ceiling	•	•
20	<b>7607</b>	LED-FXVTJ20/840/MV-CM	4000K	1,713	150	Ceiling	•	•

## DIMENSIONS

### 20W - Wall Mount 3.80-lbs

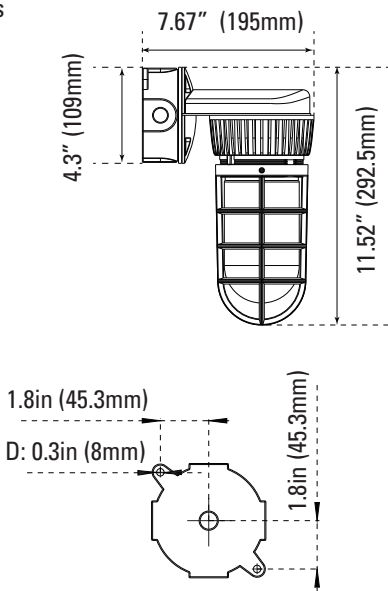

### 20W - Ceiling Mount 3.80-lbs

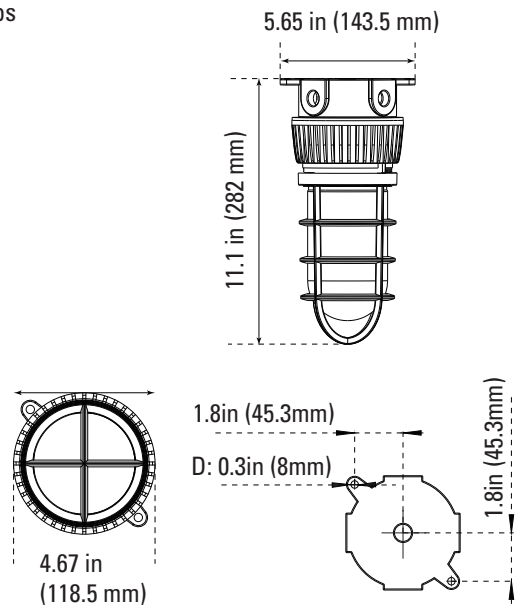

## ACCESSORIES (Ordered Separately)


### Replacement Lens



**P10169 LENS-VTJ**  
(Replacement Lens for Vapor Tight Jelly Jar)

## PHOTOMETRICS CHART

### 20 Watt Energy Star



Center Beam fc	Beam Width
2.5R	59.6 fc 20.4 ft 20.3 ft
5.0R	14.9 fc 40.0 ft 40.7 ft
7.5R	6.62 fc 61.2 ft 61.0 ft
10.0R	3.73 fc 81.6 ft 81.4 ft
12.5R	2.38 fc 102.0 ft 101.7 ft
15.0R	1.66 fc 122.4 ft 122.0 ft

■ Vert. Spread: 152.8°  
■ Horiz. Spread: 152.4°

## PACKAGE

Case Qty 2 pcs

